



Two sided boundary stabilization of heterodirectional linear coupled hyperbolic PDEs

Jean Auriol, Florent Di Meglio

► To cite this version:

Jean Auriol, Florent Di Meglio. Two sided boundary stabilization of heterodirectional linear coupled hyperbolic PDEs. 2016. hal-01318708v1

HAL Id: hal-01318708

<https://minesparis-psl.hal.science/hal-01318708v1>

Preprint submitted on 19 May 2016 (v1), last revised 28 Nov 2016 (v3)

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Two sided boundary stabilization of heterodirectional linear coupled hyperbolic PDEs

Jean Auriol¹ and Florent Di Meglio²

I. INTRODUCTION

Abstract— We solve the problem of stabilizing a general class of linear first-order hyperbolic systems using actuation at both boundary of the spatial domain. We design a novel Fredholm transformation similarly to backstepping approaches to derive a full-state feedback law and a boundary observer enabling stabilization by output feedback. This yields an explicit full-state feedback law that achieves the theoretical lower bound for convergence to zero.

This article solves the problem of boundary stabilization of a general class of coupled heterodirectional linear first-order hyperbolic systems of Partial Differential Equations (PDEs) in minimum time, with arbitrary numbers m and n of PDEs in each direction. The actuation is applied on both boundaries. Research on controllability and stability of hyperbolic systems are crucial in so far as these equations are predominant in modeling physical systems: traffic flow [1], heat exchanger [25], open channel flow [8], [11] or multiphase flow [12], [13], [14] can be modeled using systems of first-order hyperbolic PDEs. The first step was an explicit computation of the solution along the characteristic curves in the framework of the C^1 norm [15], [18], [22]. A next step ([6], [7]) was the design of dissipative boundary conditions for nonlinear hyperbolic system using Control Lyapunov Functions methods. Thus, in [10] control laws for a system of two coupled nonlinear PDEs are derived, whereas in [5], [7], [20], [21], [23] sufficient conditions (that impose restrictions on the magnitude of the coupling coefficients) for exponential stability are given for various classes of quasilinear first-order hyperbolic system.

More recently, the backstepping approach has enabled the design of stabilizing full-state feedback laws. These controllers are *explicit*, in the sense that they are expressed as a linear functional of the distributed state at each instant. The (distributed) gains can be computed offline.

Comparing results obtained via backstepping design with existence results for stabilizing controllers reveals a gap. In [19], an extensive review of controllability results for linear hyperbolic systems is given, along with the theoretical lower bounds for convergence times. These bounds vary according, mainly, to the number and location of available actuators. Backstepping results have, until now, focused on single-boundary actuation, see e.g. [10] for the case of two

coupled PDEs, [16] for an arbitrary number of PDEs or [?] for a minimum-time result in the general (single boundary actuation) case.

When actuation is applied at both boundaries, the literature usually focuses on design of dissipative boundary conditions to stabilize the system. This does not guarantee stabilization in the minimum theoretical time, and is only possible for small coupling terms between PDEs, but can generally be achieved using static boundary output feedback, which is much less computationally intensive. Recently the problem of stabilizing a system of two coupled PDEs with control at both sides has been solved in [?] in the case of reaction-diffusion PDEs and for 2-state heterodirectional linear PDEs with equal transport velocities. A generalization of this result for a general system of two hyperbolic PDEs is given in [?].

The main contribution of this paper is a generalization of this result with the design of a minimum time stabilizing controller in the general case of heterodirectional hyperbolic PDEs with actuation at both boundaries. A proposed boundary feedback law ensures finite-time convergence of the states to zero in minimum time. The minimum time defined [19] is the largest time between the different transport times in each direction.

Our approach, similar to the one presented in [?] is the following. Using a Fredholm transformation, the system is mapped to a *target system* with desirable stability properties. This target-system is designed as an exponentially stable cascade. The well-posedness of the Fredholm transformation is a consequence of a clever choice of the domain on which the kernels are defined and of the cascade structure of the target system. A full-state feedback law guaranteeing exponential stability of the zero equilibrium in the \mathcal{L}^2 -norm is then designed. This full-state feedback law requires full distributed measurements. For this reason we derive a boundary observer relying on measurements of the states at the anti-collocated boundaries. The proof of the invertibility of the Fredholm transformation is non-trivial and uses an operator-approach inspired by the one developed in [9].

The main technical difficulty of this paper is to prove well-posedness of the Fredholm transformation. Interestingly, the transformation kernels satisfy a system of equations with a cascade structure akin to the target system one. This structure enables a recursive proof of existence of the transformation kernels.

¹Jean Auriol is with MINES ParisTech, PSL Research University, CAS - Centre automatique et systèmes, 60 bd St Michel 75006 Paris, France. jean.auriol@mines-paristech.fr

²Florent Di Meglio is with MINES ParisTech, PSL Research University, CAS - Centre automatique et systèmes, 60 bd St Michel 75006 Paris, France. florent.di.meglio@mines-paristech.fr

The paper is organized as follows. In Section II we introduce the model equations and the notations. In Section III we present the stabilization result: the target system and its properties are presented in Section III-A. In Section III-B, we derive the integral transformation and we present the domains on which the kernels are defined. The well-posedness of the kernel equations is proved in Section IV. This proof uses an important theorem which is given in Appendix in order to make the whole paper more readable. In Section V we prove the invertibility of the Fredholm transformation using an operator approach. The control feedback law and its properties are given in Section VI. In Section VII we present the uncollocated observer design. This observer is obtained with the a similar approach than the one developed for the control law. Finally, some simulation results are given in Section VIII. We conclude this article with some remarks presented in Section IX.

II. PROBLEM DESCRIPTION

A. System under consideration

We consider the following general linear hyperbolic system which appear in Saint-Venant equations, heat exchangers equations and other linear hyperbolic balance laws (see [3]).

$$u_t(t, x) + \Lambda^+ u_x(t, x) = \Sigma^{++} u(t, x) + \Sigma^{+-} v(t, x) \quad (1)$$

$$v_t(t, x) - \Lambda^- v_x(t, x) = \Sigma^{-+} u(t, x) + \Sigma^{--} v(t, x) \quad (2)$$

evolving in $\{(t, x) \mid t > 0, x \in [0, 1]\}$, with the following linear boundary conditions

$$u(t, 0) = U(t), \quad v(t, 1) = V(t) \quad (3)$$

where

$$u = (u_1 \dots u_n)^T, \quad v = (v_1 \dots v_m)^T \quad (4)$$

$$\Lambda^+ = \begin{pmatrix} \lambda_1 & & 0 \\ & \ddots & \\ 0 & & \lambda_n \end{pmatrix}, \quad \Lambda^- = \begin{pmatrix} \mu_1 & & 0 \\ & \ddots & \\ 0 & & \mu_m \end{pmatrix} \quad (5)$$

with constant speeds:

$$-\mu_m < \dots < -\mu_1 < 0 < \lambda_1 < \dots < \lambda_n \quad (6)$$

and constant real coupling matrices

$$\Sigma^{++} = \{\sigma_{ij}^{++}\}_{1 \leq i \leq n, 1 \leq j \leq n} \quad \Sigma^{+-} = \{\sigma_{ij}^{+-}\}_{1 \leq i \leq n, 1 \leq j \leq m} \quad (7)$$

$$\Sigma^{-+} = \{\sigma_{ij}^{-+}\}_{1 \leq i \leq m, 1 \leq j \leq n} \quad \Sigma^{--} = \{\sigma_{ij}^{--}\}_{1 \leq i \leq m, 1 \leq j \leq m} \quad (8)$$

The initial conditions denoted u_0 and v_0 are assumed to belong to $L^2([0, 1])$. In the following we denote

$$\forall i, j \quad a_{ij} = \frac{\lambda_i}{\lambda_i + \mu_j} \quad (9)$$

We also define

$$\bar{a} = \min_{1 \leq i \leq n, 1 \leq j \leq m} |a_{ij} - \frac{1}{2}| \quad (10)$$

Remark 1: \bar{a} can be written as a_{kl} with $k \in [0, n]$ and $l \in [0, m]$ (the uniqueness is not guaranteed). For this particular solution we denote $\bar{\lambda}$ and $\bar{\mu}$ the corresponding transport velocities.

Remark 2: The coupling terms are assumed constant here but the results of this paper can be adjusted for spatially-varying coupling terms.

B. Well-posedness and operator formulation

We can rewrite the system in the abstract form

$$\frac{d}{dt} \begin{pmatrix} u \\ v \end{pmatrix} = A \begin{pmatrix} u \\ v \end{pmatrix} + B \begin{pmatrix} U \\ V \end{pmatrix} \quad (11)$$

where the operators A and B can be identified through their adjoints. The operator A is thus defined by

$$A : D(A) \subset (L^2(0, 1))^{n+m} \rightarrow (L^2(0, 1))^{n+m} \\ \begin{pmatrix} u \\ v \end{pmatrix} \mapsto \begin{pmatrix} -\Lambda^+ u_x + \Sigma^{++} u + \Sigma^{+-} v \\ \Lambda^- v_x + \Sigma^{-+} u + \Sigma^{--} v \end{pmatrix} \quad (12)$$

with

$$D(A) = \{(u, v) \in (H^1(0, 1))^{n+m} \mid u(0) = v(1) = 0\} \quad (13)$$

A is well defined and its adjoint A^* is

$$A^* : D(A^*) \subset (L^2(0, 1))^{n+m} \rightarrow (L^2(0, 1))^{n+m} \\ \begin{pmatrix} u \\ v \end{pmatrix} \mapsto \begin{pmatrix} \Lambda^+ u_x + (\Sigma^{++})^T u + (\Sigma^{+-})^T V \\ -\Lambda^- v_x + (\Sigma^{-+})^T u + (\Sigma^{--})^T v \end{pmatrix} \quad (14)$$

with

$$D(A^*) = \{(u, v) \in (H^1(0, 1))^{n+m} \mid u(1) = v(0) = 0\} \quad (15)$$

The operator B is defined by

$$< B \begin{pmatrix} U \\ V \end{pmatrix}, \begin{pmatrix} z_1 \\ z_2 \end{pmatrix} > = z_1(0)^T \Lambda^+ U + z_2(1)^T \Lambda^- V \quad (16)$$

Its adjoint is

$$B^* \begin{pmatrix} z_1 \\ z_2 \end{pmatrix} = \begin{pmatrix} z_1(0)^T \Lambda^+ \\ z_2(1)^T \Lambda^- \end{pmatrix} \quad (17)$$

C. Control problem

The goal is to design feedback control inputs $U(t) = (U_1(t), \dots, U_n(t))^T$ and $V(t) = (V_1(t), \dots, V_m(t))^T$ such that the zero equilibrium is reached in minimum time $t = t_F$, where

$$t_F = \max \left\{ \frac{1}{\mu_1}, \frac{1}{\lambda_1} \right\} \quad (18)$$

This “minimum time” is the time needed for the slowest characteristic to travel the entire length of the spatial domain. The existence of a control law reaching the null equilibrium in time t_F is proved in [19] using a method of characteristics. To the best of our knowledge, no explicit feedback law has been designed to achieve this goal. Previous approaches yield

- exponential stability for small coupling terms when two-sided static output feedback is used [3].

- finite-time stability in time $\frac{1}{\lambda_1} + \frac{1}{\mu_1} > \max\left\{\frac{1}{\mu_1}, \frac{1}{\lambda_1}\right\}$ when one-sided backstepping design is used, i.e with one controlled boundary only.
- finite-time stability in time $\max\left\{\frac{1}{\mu}, \frac{1}{\lambda}\right\}$ when only two equations are considered [CITER]

In the second case, the system is mapped with a Volterra transformation to a target system that has a cascade structure, which is natural for backstepping. In the latter case, a Fredholm transformation is used to map the system to a target system with desirable properties of stability. In the following we use a combination of these two approaches.

III. CONTROL DESIGN

The control design is based on a modified backstepping approach: using a specific transformation, we map the system (1)-(3) to a target system with desirable properties of stability. However, unlike the classical backstepping approach where a Volterra transformation is used, we use a Fredholm transformation here.

A. Target system design

We map the system (1)-(3) to the following system

$$\alpha_t(t, x) + \Lambda^+ \alpha_x(t, x) = \Omega(x) \alpha(t, x) + \Gamma(x) \beta(t, x) \quad (19)$$

$$\beta_t(t, x) - \Lambda^- \beta_x(t, x) = \bar{\Omega}(x) \beta(t, x) + \bar{\Gamma}(x) \alpha(t, x) \quad (20)$$

with the following boundary conditions

$$\alpha(t, 0) = 0 \quad \beta(t, 1) = 0 \quad (21)$$

while Ω and $\bar{\Omega} \in L^\infty(0, 1)$ are upper triangular matrices with the following structure

$$\Omega(x) = \begin{pmatrix} \omega_{1,1}(x) & \omega_{1,2}(x) & \dots & \omega_{1,n}(x) \\ 0 & \ddots & \ddots & \vdots \\ \vdots & \ddots & \omega_{n-1,n-1}(x) & \omega_{n-1,n}(x) \\ 0 & \dots & 0 & \omega_{n,n}(x) \end{pmatrix} \quad (22)$$

$$\bar{\Omega}(x) = \begin{pmatrix} \bar{\omega}_{1,1}(x) & \bar{\omega}_{1,2}(x) & \dots & \bar{\omega}_{1,m}(x) \\ 0 & \ddots & \ddots & \vdots \\ \vdots & \ddots & \bar{\omega}_{m-1,m-1}(x) & \bar{\omega}_{m-1,m}(x) \\ 0 & \dots & 0 & \bar{\omega}_{m,m}(x) \end{pmatrix} \quad (23)$$

The coefficients of the matrices $\Gamma(x)$ and $\bar{\Gamma}(x)$ are defined by

$$\forall 1 \leq i \leq n \quad \forall 1 \leq j \leq m$$

$$\Gamma_{ij}(x) = \begin{cases} 0 & \text{if } a_{ij} > \bar{a} \text{ or } x < a_{ij} \\ \gamma_{ij}(x) & \text{otherwise} \end{cases} \quad (24)$$

$$\forall 1 \leq i \leq m \quad \forall 1 \leq j \leq n$$

$$\bar{\Gamma}_{ij}(x) = \begin{cases} 0 & \text{if } a_{ji} \leq 1 - \bar{a} \text{ or } x > a_{ji} \\ \bar{\gamma}_{ij}(x) & \text{otherwise} \end{cases} \quad (25)$$

Besides, the following lemma assesses the finite-time convergence of the target system.

Lemma 1: The system (19)-(20) reaches its zero equilibrium in finite-time $t_F = \max\left\{\frac{1}{\lambda}, \frac{1}{\mu}\right\} = \frac{1}{\lambda}$.

Proof: $\forall 1 \leq i \leq n, \forall 1 \leq j \leq n$, system (19)-(20) can be rewritten as

$$\alpha_t^i(t, x) + \lambda_i \alpha_x^i = \sum_{p=i}^n \omega_{ip}(x) \alpha^p(t, x) + \sum_{p=1}^m \gamma_{ip}(x) h_{[a_{ip}, 1]}(x) \beta^p(t, x) \quad (26)$$

$$\beta_t^j(t, x) - \mu_j \beta_x^j = \sum_{p=j}^m \bar{\omega}_{jp}(x) \beta^p(t, x) + \sum_{p=1}^n \bar{\gamma}_{jp}(x) h_{[0, a_{pj}]}(x) \alpha^p(t, x) \quad (27)$$

where, for any interval I , h_I is defined by

$$h_I(x) = \begin{cases} 1 & \text{if } x \in I \\ 0 & \text{else} \end{cases} \quad (28)$$

with the convention

$$\gamma_{ij}(x) = 0 \quad \text{if } a_{ij} > \bar{a} \quad (29)$$

$$\bar{\gamma}_{ij}(x) = 0 \quad \text{if } a_{ji} \leq 1 - \bar{a} \quad (30)$$

By induction, let us consider the following property $P(s)$ defined for all $1 \leq s \leq n$

$$P(s) : \quad \forall p \geq n + 1 - s, \quad \text{if } t \geq \frac{x}{\lambda_p} \quad \text{then } \alpha^p(x, t) = 0$$

Initialization: The initialization can be proved using a similar technique than the one presented bellow in the induction and is not detailed here.

Induction: Let us assume that the property $P(s-1)$ ($1 < s \leq n$) is true. We denote $r = n + 1 - s$. Integrating the r^{th} line of (26) along its characteristic lines and using the boundary condition $\alpha^r(t, 0) = 0$, yields:

$$\begin{aligned} \alpha^r(t, x) &= \int_0^{\frac{x}{\lambda_r}} \sum_{p=r}^n \omega_{rp}(x - \lambda_r \nu) \alpha^p(t - \nu, x - \lambda_r \nu) \\ &\quad + \sum_{p=1}^m \gamma_{rp}(x - \lambda_r \nu) h_{[a_{rp}, 1]}(x - \lambda_r \nu) \beta^p(t - \nu, x - \lambda_r \nu) d\nu \end{aligned} \quad (31)$$

with $x \in [0, 1]$ and $t \geq \frac{x}{\lambda_r}$. Consequently, $\forall p > r$:

$$\begin{aligned} t \geq \frac{x}{\lambda_r} &\Rightarrow \left(1 - \frac{\lambda_r}{\lambda_p}\right) \frac{x}{\lambda_r} \leq t - \frac{x}{\lambda_p} \\ &\Rightarrow \left(1 - \frac{\lambda_r}{\lambda_p}\right) \nu \leq t - \frac{x}{\lambda_p} \quad \forall \nu \in [0, \frac{x}{\lambda_r}] \\ &\Rightarrow t - \nu \geq \frac{x - \lambda_r \nu}{\lambda_p} \\ &\Rightarrow \alpha^p(t - \nu, x - \lambda_r \nu) = 0 \end{aligned} \quad (32)$$

The last implication uses the fact that $P(s-1)$ is true. Let us now consider the following property $P_1(q)$ defined for all $1 \leq q \leq m$

$$P_1(q) : \forall x > a_{rq}, \quad \forall t \geq \frac{1-x}{\mu_q}, \quad \beta^q(t, x) = 0$$

Initialization: The initialization can be proved using a similar technique than the one presented bellow in the induction and is not detailed here.

Induction: Let us assume that the property $P_1(q-1)$ ($1 < q \leq m$) is true. Integrating the q^{th} line of (27) along its characteristic lines and using the boundary condition $\beta_q(t, 0) = 0$, yields:

$$\begin{aligned} \beta_q(t, x) &= \int_0^{\frac{1-x}{\mu_q}} \sum_{p=q}^n \bar{\omega}_{qp}(\mu_q \nu + x) \beta^p(t - \nu, \mu_q \nu + x) \\ &+ \sum_{p>r}^n \bar{\gamma}_{ip}(\mu_q \nu + x) h_{[0, a_{pq}]}(\mu_q \nu + x) \alpha^p(t - \nu, \mu_q \nu + x) d\nu \end{aligned} \quad (33)$$

with $1 \geq x > a_{rq}$, and $t \geq \frac{1-x}{\mu_q}$. Consequently, $\forall p \geq q$ and $\forall \nu \in [0, \frac{1-x}{\mu_q}]$ such that $\mu_q \nu + x \leq a_{pq}$ (in order to have $h_{[0, a_{pq}]}(\mu_q \nu + x) \neq 0$):

$$\begin{aligned} t \geq \frac{1-x}{\mu_q} &\Rightarrow t - \frac{x}{\lambda_p} \geq \left(\frac{\lambda_p}{\mu_q(\lambda_p + \mu_q)} - \frac{x}{\mu_q} \right) \left(1 + \frac{\mu_q}{\lambda_p} \right) \\ &\Rightarrow t - \frac{x}{\lambda_p} \geq \left(\frac{a_{pq}}{\mu_q} - \frac{x}{\mu_q} \right) \left(1 + \frac{\mu_q}{\lambda_p} \right) \\ &\Rightarrow t - \frac{x}{\lambda_p} \geq \left(1 + \frac{\mu_q}{\lambda_p} \right) \nu \\ &\Rightarrow t - \nu \geq \frac{x + \mu_q \nu}{\lambda_p} \end{aligned}$$

Consequently, using the fact that $P(s-1)$ is true, it yields $\forall \nu \in [0, \frac{1-x}{\mu_q}]$ such that $\mu_q \nu + x \geq a_{pq}$

$$\alpha^p(t - \nu, \mu_q \nu + x) = 0 \quad (34)$$

Consequently the second sum in (33) is always null for $t \geq \frac{1-x}{\mu_q}$. Moreover, using the fact that $P_1(q-1)$ is true, we can simplify the first sum removing most of the terms. We can rewrite (33) as:

$$\beta^q(t, x) = \int_0^{\frac{1-x}{\mu_q}} \bar{\omega}_{qq}(\mu_q \nu + x) \beta^q(t - \nu, \mu_q \nu + x) d\nu \quad (35)$$

with $1 \geq x > a_{rq}$, and $t \geq \frac{1-x}{\mu_q}$. Consequently $\beta^q(t, x) = 0$ and $P_1(q)$ is true. This achieves the proof of $P_1(q)$ for all $1 \leq q \leq m$.

For a given p we now focus on the following term of (31)

$$\gamma_{rp}(x - \lambda_r \nu) h_{[a_{rp}, 1]}(x - \lambda_r \nu) \beta^p(t - \nu, x - \lambda_r \nu) \quad (36)$$

This term can be non null only if

$$x - \lambda_r \nu \geq a_{rp} \quad \forall \nu \in [0, \frac{x}{\lambda_r}] \quad (37)$$

Consequently, this result combined with the fact that $t \geq \frac{x}{\lambda_r}$ yields

$$\begin{aligned} t - \nu &\geq \frac{a_{rp}}{\lambda_s} \geq \frac{1}{\lambda_r + \mu_p} \geq \frac{1 - x + \lambda_r \nu}{\lambda_r + \mu_p} \\ &\geq \frac{1 - x + \lambda_r \nu}{\mu_p} \end{aligned} \quad (38)$$

Using P_1 we can deduce that (36) is always null if $t \leq \frac{x}{\lambda_r}$ ($\nu \in [0, \frac{x}{\lambda_r}]$). Consequently, combining this result with (32), we can rewrite (31) as

$$\alpha^s(t, x) = \int_0^{\frac{x}{\lambda_r}} \omega_{rr}(x - \lambda_r \nu) \alpha^r(t - \nu, x - \lambda_r \nu) \quad (39)$$

with $x \in [0, 1]$ and $t \geq \frac{x}{\lambda_r}$. Consequently it yields

$$\forall x \in [0, 1], \quad t \geq \frac{x}{\lambda_p} \Rightarrow \alpha^p(x, t) = 0 \quad (40)$$

It achieves the recursion. It is then quite straightforward to prove a similar result for β . Consequently we have

$$\forall t \geq \frac{1}{\lambda_1}, \quad \alpha(x, t) = 0 \quad (41)$$

$$\forall t \geq \frac{1}{\mu_1}, \quad \beta(x, t) = 0 \quad (42)$$

This concludes the proof. \blacksquare

Using an operator framework, system (19)-(20) rewrites as

$$\frac{d}{dt} \begin{pmatrix} \alpha \\ \beta \end{pmatrix} = A_0 \begin{pmatrix} \alpha \\ \beta \end{pmatrix} \quad (43)$$

The operator A_0 is defined by

$$\begin{aligned} A_0 : D(A_0) \subset (L^2(0, 1))^2 &\rightarrow (L^2(0, 1))^2 \\ \begin{pmatrix} \alpha \\ \beta \end{pmatrix} &\mapsto \begin{pmatrix} -\Lambda^+ \alpha_x + \Omega \alpha + \Gamma \beta \\ \Lambda^- \beta_x + \bar{\Omega} \beta + \bar{\Gamma} \alpha \end{pmatrix} \end{aligned} \quad (44)$$

with

$$D(A_0) = \{(\alpha, \beta) \in (H^1(0, 1))^2 \mid \alpha(0) = \beta(1) = 0\} \quad (45)$$

A_0 is well defined and its adjoint A_0^* is

$$\begin{aligned} A_0^* : D(A_0^*) \subset (L^2(0, 1))^2 &\rightarrow (L^2(0, 1))^2 \\ \begin{pmatrix} \alpha \\ \beta \end{pmatrix} &\mapsto \begin{pmatrix} \alpha_x^T \Lambda^+ + \alpha^T \Omega + \beta^T \bar{\Gamma} \\ -\beta_x^T \Lambda^- + \beta^T \bar{\Omega} + \alpha^T \Gamma \end{pmatrix}^T \end{aligned} \quad (46)$$

with

$$D(A_0^*) = \{(\alpha, \beta) \in (H^1(0, 1))^2 \mid \alpha(1) = \beta(0) = 0\} \quad (47)$$

B. Fredholm transformation

1) Definition of the transformation: In order to map the original system (1)-(3) to the target system (19)-(21), we use the following transformation

$$\begin{aligned}
\alpha(t, x) &= u(t, x) \\
&+ h_{[0, \bar{a}]}(x) \int_x^{-\frac{\bar{\mu}}{\bar{\lambda}}x+1} (K(x, \xi)u(t, \xi) + L(x, \xi)v(t, \xi))d\xi \\
&+ h_{[\bar{a}, 1]}(x) \int_{\frac{\bar{\lambda}}{\bar{\mu}}(1-x)}^x (M(x, \xi)u(t, \xi) + N(x, \xi)v(t, \xi))d\xi
\end{aligned} \tag{48}$$

$$\begin{aligned}
\beta(t, x) &= v(t, x) \\
&+ h_{[0, \bar{a}]}(x) \int_x^{-\frac{\bar{\mu}}{\bar{\lambda}}x+1} (\bar{K}(x, \xi)u(t, \xi) + \bar{L}(x, \xi)v(t, \xi))d\xi \\
&+ h_{[\bar{a}, 1]}(x) \int_{\frac{\bar{\lambda}}{\bar{\mu}}(1-x)}^x (\bar{M}(x, \xi)u(t, \xi) + \bar{N}(x, \xi)v(t, \xi))d\xi
\end{aligned} \tag{49}$$

where we recall that for any interval I , $h_I(x)$ is defined by

$$h_I(x) = \begin{cases} 1 & \text{if } x \in I \\ 0 & \text{else} \end{cases} \tag{50}$$

We define the following triangular domains, depicted in Figure 1:

$$\mathcal{T}_0 = \{(x, \xi) \mid x \in [0, \bar{a}], \quad x \leq \xi \leq -\frac{\bar{\mu}}{\bar{\lambda}}x + 1\} \tag{51}$$

$$\bar{\mathcal{T}}_1 = \{(x, \xi) \mid x \in [\bar{a}, 1], \quad \frac{\bar{\lambda}}{\bar{\mu}}(1-x) < \xi \leq x\} \tag{52}$$

The kernels K, L, \bar{K} and \bar{L} are defined on \mathcal{T}_0 . The kernels M, N, \bar{M} and \bar{N} are defined on $\bar{\mathcal{T}}_1$. They are assumed continuous in their domains of definition. They all have yet to be defined.

Remark 3: One may think that due to the use of the h -functions, the transformation presents a discontinuity in $x = \bar{a}$. Nevertheless, one can check that the right and left limits are equal since the integrals vanish and that consequently we do not have any discontinuity.

Remark 4: Since $\alpha(0) = \beta(1) = 0$ the two control laws U and V can be computed as functions of (u, v) .

Remark 5: This transformation is a Fredholm transformation and can be rewritten using integrals between 0 and 1 as follows

$$\alpha(t, x) = u(t, x) - \int_0^1 Q_{11}(x, \xi)u(t, \xi) + Q_{12}(x, \xi)v(t, \xi)d\xi \tag{53}$$

$$\beta(t, x) = v(t, x) - \int_0^1 Q_{21}(x, \xi)u(t, \xi) + Q_{22}(x, \xi)v(t, \xi)d\xi \tag{54}$$

with

$$\begin{aligned}
Q_{11}(x, \xi) &= -K(x, \xi)h_{[x, -\frac{\bar{\mu}}{\bar{\lambda}}x+1]}(\xi)h_{[0, \bar{a}]}(x) \\
&- M(x, \xi)h_{[\frac{\bar{\lambda}}{\bar{\mu}}(1-x), x]}(\xi)h_{[\bar{a}, 1]}(x)
\end{aligned} \tag{55}$$

$$\begin{aligned}
Q_{12}(x, \xi) &= -L(x, \xi)h_{[x, -\frac{\bar{\mu}}{\bar{\lambda}}x+1]}(\xi)h_{[0, \bar{a}]}(x) \\
&- N(x, \xi)h_{[\frac{\bar{\lambda}}{\bar{\mu}}(1-x), x]}(\xi)h_{[\bar{a}, 1]}(x)
\end{aligned} \tag{56}$$

$$\begin{aligned}
Q_{21}(x, \xi) &= -\bar{K}(x, \xi)h_{[x, -\frac{\bar{\mu}}{\bar{\lambda}}x+1]}(\xi)h_{[0, \bar{a}]}(x) \\
&- \bar{M}(x, \xi)h_{[\frac{\bar{\lambda}}{\bar{\mu}}(1-x), x]}(\xi)h_{[\bar{a}, 1]}(x)
\end{aligned} \tag{57}$$

$$\begin{aligned}
Q_{22}(x, \xi) &= -\bar{L}(x, \xi)h_{[x, -\frac{\bar{\mu}}{\bar{\lambda}}x+1]}(\xi)h_{[0, \bar{a}]}(x) \\
&- \bar{N}(x, \xi)h_{[\frac{\bar{\lambda}}{\bar{\mu}}(1-x), x]}(\xi)h_{[\bar{a}, 1]}(x)
\end{aligned} \tag{58}$$

Remark 6: Since $\alpha(0) = \beta(1) = 0$ the two control laws U and V can be computed as functions of (u, v) .

2) *Kernel equations:* We now differentiate the Fredholm transformation (48)-(49) with respect to time and space to compute the equations satisfied by the kernels. We start with the α -transformation (48).

If $x \leq \bar{a}$: Differentiating (48) with respect to space and using the Leibniz rule yields

$$\begin{aligned}
\alpha_x(t, x) &= u_x(t, x) - K(x, x)u(t, x) - L(x, x)v(t, x) \\
&- \frac{\bar{\mu}}{\bar{\lambda}}K(x, -\frac{\bar{\mu}}{\bar{\lambda}}x+1)u(-\frac{\bar{\mu}}{\bar{\lambda}}x+1) \\
&- \frac{\bar{\mu}}{\bar{\lambda}}L(x, -\frac{\bar{\mu}}{\bar{\lambda}}x+1)v(-\frac{\bar{\mu}}{\bar{\lambda}}x+1) \\
&+ \int_x^{-\frac{\bar{\mu}}{\bar{\lambda}}x+1} (K_x(x, \xi)u(t, \xi) + L_x(x, \xi)v(t, \xi))d\xi
\end{aligned} \tag{59}$$

Differentiating (48) with respect to time, using (1), (2) and integrating by parts yields

$$\begin{aligned}
\alpha_t(t, x) &= -\Lambda^+ u_x(t, x) + \Sigma^{++} u(t, x) + \Sigma^{+-} v(t, x) \\
&+ K(x, x)\Lambda^+ u(t, x) - L(x, x)\Lambda^- v(t, x) \\
&- K(x, -\frac{\bar{\mu}}{\bar{\lambda}}x+1)\Lambda^+ u(t, -\frac{\bar{\mu}}{\bar{\lambda}}x+1) \\
&+ L(x, -\frac{\bar{\mu}}{\bar{\lambda}}x+1)\Lambda^- v(t, -\frac{\bar{\mu}}{\bar{\lambda}}x+1) \\
&+ \int_x^{-\frac{\bar{\mu}}{\bar{\lambda}}x+1} (K_\xi(x, \xi)\Lambda^+ u(t, \xi) + L_\xi(x, \xi)\Lambda^- v(t, \xi))d\xi
\end{aligned} \tag{60}$$

Plugging these expressions into the target system (19)-(20) yields the following system of kernel equations

$$0 = \Sigma^{++} - \Lambda^+ K(x, x) + K(x, x)\Lambda^+ - \Omega(x) \tag{61}$$

$$0 = \Sigma^{+-} - \Lambda^+ L(x, x) - L(x, x)\Lambda^- - \Gamma(x) \tag{62}$$

$$0 = -\frac{\bar{\mu}}{\bar{\lambda}}\Lambda^+ L(x, -\frac{\bar{\mu}}{\bar{\lambda}}x+1) + L(x, -\frac{\bar{\mu}}{\bar{\lambda}}x+1)\Lambda^- \tag{63}$$

$$0 = \frac{\bar{\mu}}{\bar{\lambda}}\Lambda^+ K(x, -\frac{\bar{\mu}}{\bar{\lambda}}x+1) + K(x, -\frac{\bar{\mu}}{\bar{\lambda}}x+1)\Lambda^+ \tag{64}$$

$$\begin{aligned}
0 &= \Lambda^+ K_x(x, \xi) + K_\xi(x, \xi)\Lambda^+ + K(x, \xi)\Sigma^{++} \\
&+ L(x, \xi)\Sigma^{+-} - \Omega(x)K(x, \xi) - \Gamma(x)\bar{K}(x, \xi)
\end{aligned} \tag{65}$$

$$\begin{aligned}
0 &= \Lambda^+ L_x(x, \xi) - L_\xi(x, \xi)\Lambda^- + K(x, \xi)\Sigma^{+-} \\
&+ L(x, \xi)\Sigma^{--} - \Omega(x)L(x, \xi) - \Gamma(x)\bar{L}(x, \xi)
\end{aligned} \tag{66}$$

if $x > \bar{a}$: Similarly we get

$$0 = \Sigma^{++} + \Lambda^+ M(x, x) - M(x, x) \Lambda^+ - \Omega(x) \quad (67)$$

$$0 = \Sigma^{+-} + \Lambda^+ N(x, x) + N(x, x) \Lambda^- - \Gamma(x) \quad (68)$$

$$0 = -\frac{\bar{\lambda}}{\bar{\mu}} \Lambda^+ N(x, -\frac{\bar{\lambda}}{\bar{\mu}}(x-1)) + N(x, -\frac{\bar{\lambda}}{\bar{\mu}}(x-1)) \Lambda^- \quad (69)$$

$$0 = \frac{\bar{\lambda}}{\bar{\mu}} \Lambda^+ M(x, -\frac{\bar{\lambda}}{\bar{\mu}}(x-1)) + M(x, -\frac{\bar{\lambda}}{\bar{\mu}}(x-1)) \Lambda^+ \quad (70)$$

$$0 = \Lambda^+ M_x(x, \xi) + M_\xi(x, \xi) \Lambda^+ + M(x, \xi) \Sigma^{++} + N(x, \xi) \Sigma^{+-} - \Omega(x) M(x, \xi) - \Gamma(x) \bar{M}(x, \xi) \quad (71)$$

$$0 = \Lambda^+ N_x(x, \xi) - N_\xi(x, \xi) \Lambda^- + M(x, \xi) \Sigma^{+-} + N(x, \xi) \Sigma^{--} - \Omega(x) N(x, \xi) - \Gamma(x) \bar{N}(x, \xi) \quad (72)$$

We now compute the kernels for the β -transformation if $x \leq \bar{a}$: Differentiating (49) with respect to space and time and then plugging into the target system (19)-(20) yields the following system of kernel equations

$$0 = \Sigma^{+-} + \Lambda^- \bar{K}(x, x) + \bar{K}(x, x) \Lambda^+ - \bar{\Gamma}(x) \quad (73)$$

$$0 = \Sigma^{--} - \Lambda^- \bar{L}(x, x) + \bar{L}(x, x) \Lambda^- - \bar{\Omega}(x) \quad (74)$$

$$0 = -\bar{K}(x, -\frac{\bar{\mu}}{\lambda_m} x + 1) \Lambda^+ + \frac{\bar{\mu}}{\lambda} \Lambda^- \bar{K}(x, -\frac{\bar{\mu}}{\lambda} x + 1) \quad (75)$$

$$0 = \frac{\bar{\mu}}{\lambda} \Lambda^- \bar{L}(x, -\frac{\bar{\mu}}{\lambda} x + 1) + \bar{L}(x, -\frac{\bar{\mu}}{\lambda_m} x + 1) \Lambda^- \quad (76)$$

$$0 = -\Lambda^- \bar{K}_x(x, \xi) + \bar{K}_\xi(x, \xi) \Lambda^+ + \bar{K}(x, \xi) \Sigma^{++} + \bar{L}(x, \xi) \Sigma^{+-} - \bar{\Omega}(x) \bar{K}(x, \xi) - \bar{\Gamma}(x) \bar{K}(x, \xi) \quad (77)$$

$$0 = -\Lambda^- \bar{L}_x(x, \xi) - \Lambda^- \bar{L}_\xi(x, \xi) + \bar{K}(x, \xi) \Sigma^{+-} + \bar{L}(x, \xi) \Sigma^{--} - \bar{\Omega}(x) \bar{L}(x, \xi) - \bar{\Gamma}(x) \bar{L}(x, \xi) \quad (78)$$

if $x > \bar{a}$: Similarly, we get

$$0 = \Sigma^{+-} - \Lambda^- \bar{M}(x, x) - \bar{M}(x, x) \Lambda^+ - \bar{\Gamma}(x) \quad (79)$$

$$0 = \Sigma^{--} + \Lambda^- \bar{N}(x, x) - \bar{N}(x, x) \Lambda^- - \bar{\Omega}(x) \quad (80)$$

$$0 = \frac{\bar{\lambda}}{\bar{\mu}} \Lambda^- \bar{N}(x, -\frac{\bar{\lambda}}{\bar{\mu}}(x-1)) + \bar{N}(x, -\frac{\bar{\lambda}}{\bar{\mu}}(x-1)) \Lambda^- \quad (81)$$

$$0 = -\frac{\bar{\lambda}}{\bar{\mu}} \Lambda^- \bar{M}(x, -\frac{\bar{\lambda}}{\bar{\mu}}(x-1)) + \bar{M}(x, -\frac{\bar{\lambda}}{\bar{\mu}}(x-1)) \Lambda^+ \quad (82)$$

$$0 = -\Lambda^- \bar{M}_x(x, \xi) + \bar{M}_\xi(x, \xi) \Lambda^+ + \bar{M}(x, \xi) \Sigma^{++} + \bar{N}(x, \xi) \Sigma^{+-} - \bar{\Omega}(x) \bar{M}(x, \xi) - \bar{\Gamma}(x) \bar{M}(x, \xi) \quad (83)$$

$$0 = -\Lambda^- \bar{N}_x(x, \xi) - \Lambda^- \bar{N}_\xi(x, \xi) + \bar{M}(x, \xi) \Sigma^{+-} + \bar{N}(x, \xi) \Sigma^{--} - \bar{\Omega}(x) \bar{N}(x, \xi) - \bar{\Gamma}(x) \bar{N}(x, \xi) \quad (84)$$

The well-posedness of all these kernel equations is assessed in the following theorems

Theorem 1: Consider system (61)-(66) and (73)-(78). There exists a unique solution K, L, \bar{K} and \bar{L} in $L^\infty(\mathcal{T}_0)$

Theorem 2: Consider system (67)-(72) and (79)-(84). There exists a unique solution M, N, \bar{M} and \bar{N} in $L^\infty(\mathcal{T}_1)$

The proof of these theorems is described in the following section and uses the cascade structure of the kernel equations (which is due to the particular shapes of the matrices $\Omega, \bar{\Omega}, \Gamma$ and $\bar{\Gamma}$)

IV. WELL-POSEDNESS OF THE KERNEL EQUATIONS

In this section we prove Theorem 1. The proof of Theorem 2 is quite similar and is not detailed here. The proof follows three steps:

- First, we develop the kernel equations and the associated boundary conditions.
- Then we define a particular sequence in which to solve the equations using the properties of the matrices Γ and $\bar{\Gamma}$.
- Finally, this sequence is used in a recursive approach to complete the proof.

For every iteration of the recursion we prove that the i^{th} line of the system of kernel PDEs K_{ij}, L_{ij} (resp. $\bar{K}_{ij}, \bar{L}_{ij}$) is well-posed. This proof involves the following well-posedness theorem.

Theorem 3: Consider the following system of hyperbolic equations

$$\epsilon_j \partial_x F_j(x, \xi) + \nu_j \partial_\xi F_j(x, \xi) = \Sigma_j(x, \xi) F(x, \xi) \quad (85)$$

where $F = (F_1 \dots F_{n+m})$ is defined on the triangle \mathcal{D} :

$$\mathcal{D} = \{(x, \xi) | x \leq \xi \quad c_1 \xi \leq c_1 - c_2 x \quad d_1 \xi \geq d_1 - d_2 x\} \quad (86)$$

where the coefficients c_1, c_2, d_1, d_2 are all positive (examples of such domains are given on Figure...). The corresponding boundary conditions are defined on a closed subset \mathcal{R}_j included on the boundary of the domain $\partial \mathcal{D}$

$$F_j|_{\mathcal{R}_j} = f_j \quad (87)$$

Assume

- that the homogeneous system, obtained by taking $\Sigma(x, \xi) = 0$ in (85) along with boundary conditions (87) is well-posed;
- that there exists $\alpha_j > 0$ such that the following inequalities holds for all $j = 1, \dots, n+m$

$$\forall (x, \xi) \in \mathcal{D} \quad \alpha_j \epsilon_j(x) + \nu_j(\xi) < -\delta < 0 \quad (88)$$

Then the system (85) with boundary conditions (87) has a unique solution $F \in L^\infty(\mathcal{D})$.

Proof: The proof of this theorem is given in Appendix. ■

Remark 7: A necessary and sufficient condition for the first assumption to be satisfied is that, for every $j = 1 \dots n+m$ the characteristics defined by the ϵ_j, ν_j uniquely connect each point of \mathcal{T}_0 to \mathcal{D}_j .

A. Development of the kernel equations

We only focus on the kernels K, L, \bar{K} and \bar{L} defined on \mathcal{T}_0 since the proof is similar for the remaining kernels. Developing (61)-(66) and (73)-(78) we get the following set of kernel PDEs:

for $1 \leq i \leq n, 1 \leq j \leq n$

$$\begin{aligned} \lambda_i \partial_x K_{ij}(x, \xi) + \lambda_j \partial_\xi K_{ij}(x, \xi) = & - \sum_{k=1}^n \sigma_{kj}^{++} K_{ik}(x, \xi) \\ & - \sum_{p=1}^m \sigma_{pj}^{+-} L_{ip}(x, \xi) + \sum_{i \leq p \leq n} K_{pj}(x, \xi) \omega_{ip}(x) \\ & + \sum_{1 \leq p \leq m} \bar{K}_{pj}(x, \xi) \Gamma_{ip}(x) \end{aligned} \quad (89)$$

for $1 \leq i \leq n, 1 \leq j \leq m$

$$\begin{aligned} \lambda_i \partial_x L_{ij}(x, \xi) - \mu_j \partial_\xi L_{ij}(x, \xi) = & - \sum_{k=1}^m \sigma_{kj}^{--} L_{ik}(x, \xi) \\ & - \sum_{p=1}^n \sigma_{pj}^{+-} K_{ip}(x, \xi) + \sum_{i \leq p \leq n} L_{pj}(x, \xi) \omega_{ip}(x) \\ & + \sum_{1 \leq p \leq m} \bar{L}_{pj}(x, \xi) \Gamma_{ip}(x) \end{aligned} \quad (90)$$

for $1 \leq i \leq m, 1 \leq j \leq n$

$$\begin{aligned} \mu_i \partial_x \bar{K}_{ij}(x, \xi) - \lambda_j \partial_\xi \bar{K}_{ij}(x, \xi) = & \sum_{k=1}^n \sigma_{kj}^{++} \bar{K}_{ik}(x, \xi) \\ & + \sum_{p=1}^m \sigma_{pj}^{+-} \bar{L}_{ip}(x, \xi) - \sum_{i \leq p \leq m} \bar{K}_{pj}(x, \xi) \bar{\omega}_{ip}(x) \\ & - \sum_{1 \leq p \leq n} K_{pj}(x, \xi) \bar{\Gamma}_{ip}(x) \end{aligned} \quad (91)$$

for $1 \leq i \leq m, 1 \leq j \leq m$

$$\begin{aligned} \mu_i \partial_x \bar{L}_{ij}(x, \xi) + \mu_j \partial_\xi \bar{L}_{ij}(x, \xi) = & \sum_{k=1}^m \sigma_{kj}^{--} \bar{L}_{ik}(x, \xi) \\ & + \sum_{p=1}^n \sigma_{pj}^{+-} \bar{L}_{ip}(x, \xi) - \sum_{i \leq p \leq m} \bar{L}_{pj}(x, \xi) \bar{\omega}_{ip}(x) \\ & - \sum_{1 \leq p \leq n} L_{pj}(x, \xi) \bar{\Gamma}_{ip}(x) \end{aligned} \quad (92)$$

with the following set of boundary conditions (in order to make the whole content more readable we have removed the domains of definition of the indices)

$$K_{ij}(x, 1 - \frac{\bar{\mu}}{\lambda} x) = 0 \quad (93)$$

$$K_{ij}(x, x) = \frac{\sigma^{++}}{\lambda_i - \lambda_j} \quad i > j \quad (94)$$

$$\bar{L}_{ij}(x, -\frac{\bar{\mu}}{\lambda} x + 1) = 0 \quad (95)$$

$$\bar{L}_{ij}(x, x) = \frac{\sigma^{--}}{\mu_i - \mu_j} \quad i > j \quad (96)$$

$$(\frac{\mu_j}{\lambda_i} - \frac{\bar{\mu}}{\lambda}) L_{ij}(x, 1 - \frac{\bar{\mu}}{\lambda} x) = 0 \quad (97)$$

$$(-\lambda_i + \mu_i \frac{\bar{\mu}}{\lambda}) \bar{K}_{ij}(x, -\frac{\bar{\mu}}{\lambda_m} x + 1) = 0 \quad (98)$$

$$\forall x < a_{ij} \quad L_{ij}(x, x) = -\frac{\sigma_{ij}^{+-}}{\lambda_i + \mu_j} \quad (99)$$

$$\text{if } 1 - a_{ji} \geq \bar{a} \quad \bar{K}_{ij}(x, x) = -\frac{\sigma_{ij}^{--}}{\lambda_j + \mu_i} \quad (100)$$

We add the following arbitrary boundary conditions (in order to have a well-posed system)

$$\text{if } 1 - a_{ji} < \bar{a} \quad \bar{K}_{ij}(0, \xi) = 0 \quad (101)$$

Besides, (61) imposes

$$\forall i \leq j \quad \omega_{ij}(x) = (\lambda_j - \lambda_i) K_{ij}(x, x) + \sigma_{ij}^{++} \quad (102)$$

and (62) imposes

$$\forall a_{ij} < x < 1 \quad \gamma_{ij}(x) = -(\lambda_i + \mu_j) L_{ij}(x, x) + \sigma_{ij}^{+-} \quad (103)$$

Similarly (74) imposes

$$\forall i \leq j \quad \bar{\omega}_{ij}(x) = (\mu_j - \mu_i) \bar{L}_{ij}(x, x) + \sigma_{ij}^{--} \quad (104)$$

and (73) imposes

$$\forall 0 \leq x \leq a_{ji} \quad \bar{\gamma}_{ij}(x) = (\mu_i + \lambda_j) \bar{K}_{ij}(x, x) + \sigma_{ij}^{+-} \quad (105)$$

This induces a coupling between the kernels through equations (89), (90), (91) and (92) that could appear as non linear at first sight. However, the coupling has a linear cascade structure due to the particular shapes of the matrices Ω , $\bar{\Omega}$, Γ and $\bar{\Gamma}$. We now define two sequences r_i and \bar{r}_i that will be used in a recursive proof of the well-posedness. Some of these equations with the corresponding characteristic lines are represented on Figure 1 and Figure 2.

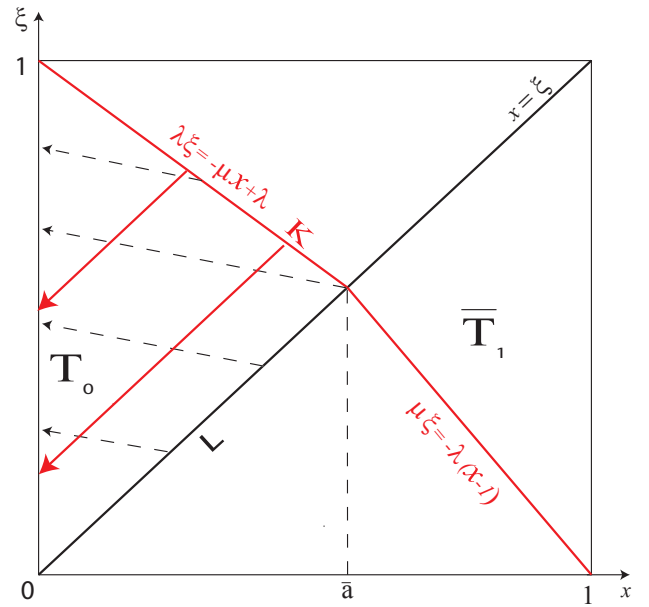


Fig. 1. Representation of the K-kernels and the L-kernels ($a_{ij} \geq \bar{a}$)

Remark 8: The artificial boundary condition we add for the kernel \bar{K} is not a degree of freedom since it has no impact on the control law and on the stability of the target system.

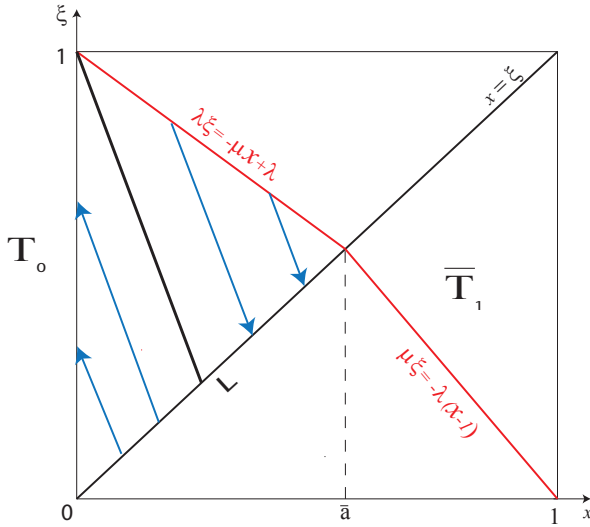


Fig. 2. Representation of the L-kernels ($a_{ij} < \bar{a}$)

B. Definition of the sequences r_i and \bar{r}_i

In this subsection we define two sequences r_i and \bar{r}_i that we are going to use in the recursive proof. Let us consider the matrices Δ and $\bar{\Delta}$ defined by the following relations

$$\forall 1 \leq i \leq n \forall 1 \leq j \leq m \Delta_{ij} = \begin{cases} 0 & \text{if } a_{ij} > \bar{a} \\ 1 & \text{else} \end{cases} \quad (106)$$

$$\forall 1 \leq i \leq m \forall 1 \leq j \leq n \bar{\Delta}_{ij} = \begin{cases} 0 & \text{if } a_{ji} \leq 1 - \bar{a} \\ 1 & \text{else} \end{cases} \quad (107)$$

These matrices have exactly the same structure as the matrices Γ and $\bar{\Gamma}$. We have the following results (the proofs are quite straightforward and are omitted there).

Lemma 2: $\bar{\Delta} = 1 - \Delta^T$

The proof relies on the fact that due to the definition of \bar{a} (Equation (10)), if $a_{ij} > \bar{a}$ then $a_{ij} > 1 - \bar{a}$.

Lemma 3: If $\Delta_{ij} = 0$ then $\forall k > i \Delta_{kj} = 0$

Lemma 4: If $\Delta_{ij} = 0$ then $\forall k < j \Delta_{ik} = 0$

The two previous lemmas use the fact that $a_{ij} < a_{i+1,j}$ and $a_{ij} > a_{i,j+1}$. Same results hold for $\bar{\Delta}$.

Lemma 5: Either the last line of Δ or the last line of $\bar{\Delta}$ is null.

Proof: Let us assume that the last line of $\bar{\Delta}$ is non-null. Consequently, $\forall j \in [1, n] a_{jm} \leq 1 - \bar{a}$ and particularly $a_{nm} \leq 1 - \bar{a}$. This implies $a_{nm} \leq \bar{a}$ (due to the definition of \bar{a}) and it yields $\Delta_{mn} = 0$. Using the previous Lemma concludes the proof. ■

In the following we denote s_i (resp \bar{s}_i) the number of coefficients which are equal to 1 in the i^{th} line of Δ (resp $\bar{\Delta}$). For $0 \leq i \leq n + m$, we define the sequences r_i and \bar{r}_i

$$\begin{cases} \text{if } \bar{r}_0 - \bar{r}_i \geq s_{r_i-1} & \text{then } r_{i+1} = r_i - 1 \quad \bar{r}_{i+1} = \bar{r}_i \\ \text{if } r_0 - r_i \geq \bar{s}_{\bar{r}_i-1} & \text{then } \bar{r}_{i+1} = \bar{r}_i - 1 \quad r_{i+1} = r_i \end{cases}$$

where $r_0 = n + 1$, $\bar{r}_0 = m + 1$. We use the convention $s_0 = \bar{s}_0 = \infty$.

Theorem 4: The sequences r_i , \bar{r}_i are well defined. Moreover $r_{n+m} = \bar{r}_{n+m} = 1$

Proof: To prove that the sequences are well defined we need to prove that for any $0 \leq i \leq n + m$ one and one only of the following assumptions is true

$$\bar{r}_0 - \bar{r}_i \geq s_{r_i-1} \quad (108)$$

$$r_0 - r_i \geq \bar{s}_{\bar{r}_i-1} \quad (109)$$

We start by proving that at least one of the two assumptions is true. By contradiction let us assume that none of them hold. Consequently we have, for some i

$$\bar{r}_0 - \bar{r}_i < s_{r_i-1} \quad (110)$$

$$r_0 - r_i < \bar{s}_{\bar{r}_i-1} \quad (111)$$

- By definition of s_{r_i-1} , we have exactly s_{r_i-1} coefficients that are equal to 1 on the $(r_i - 1)^{th}$ line of the matrix Δ . Using Lemma 2 yields that we have exactly $m - s_{r_i-1}$ coefficients equal to 1 on the $(r_i - 1)^{th}$ column of $\bar{\Delta}$

- By definition of $\bar{s}_{\bar{r}_i-1}$, we have exactly $\bar{s}_{\bar{r}_i-1}$ coefficients that are equal to 1 on the $(\bar{r}_i - 1)^{th}$ line of $\bar{\Delta}$. Consequently $\bar{\Delta}_{\bar{r}_i-1, \bar{s}_{\bar{r}_i-1}} = 1$. Adjusting Lemma 3 to $\bar{\Delta}$ yields that on the $(n + 1 - \bar{s}_{\bar{r}_i-1})^{th}$ column of $\bar{\Delta}$ we have at least $\bar{r}_i - 1$ coefficients equal to 1.

- Since $n + 1 - \bar{s}_{\bar{r}_i} < r_i$ we get $n + 1 - \bar{s}_{\bar{r}_i} \leq r_i - 1$. It means that the column $n + 1 - \bar{s}_{\bar{r}_i}$ is located left than the column $r_i - 1$. Consequently, using Lemma 3, we must have a larger number of coefficients equal to 1 on the column $r_i - 1$ than on the column $n + 1 - \bar{s}_{\bar{r}_i}$. This implies

$$m - s_{r_i-1} \geq \bar{r}_i - 1 \quad (112)$$

which is a contradiction with (110). To achieve the proof of the well posedness of the two sequences r_i and \bar{r}_i , we need to prove that the two assumptions (108)-(109) cannot both be true. This is quite straightforward uses the same ideas. If we assume that (109) holds, then $n + 1 - \bar{s}_{\bar{r}_i} \geq r_i$ implies that the column $n + 1 - \bar{s}_{\bar{r}_i}$ of $\bar{\Delta}$ is located strictly righter than the column $r_i - 1$ and that consequently (Lemma 4), the number of coefficients equal to 1 on the former column is larger than the number on the later. This implies

$$m - s_{r_i-1} < \bar{r}_i - 1 \quad (113)$$

and consequently (108) is false. The same holds when (108) is true. ■

The following lemma makes the link between the matrices Δ , $\bar{\Delta}$, and Γ , $\bar{\Gamma}$.

Lemma 6: The matrix $\Gamma(x)$ has at least $m - s_i$ null-coefficients on its i^{th} line. Similarly, the matrix $\bar{\Gamma}(x)$ has at least $n - \bar{s}_i$ null-coefficients on its i^{th} line.

Corollary 1: $\forall i \leq n, \forall j \leq m - s_i, \Gamma(x)_{ij} = 0$ and $\forall i \leq m, \forall j \leq n - \bar{s}_i, \bar{\Gamma}(x)_{ij} = 0$

Proof: The proofs of this lemma and of this corollary are quite straightforward noticing that the matrices Γ (resp. $\bar{\Gamma}$) and Δ (resp. $\bar{\Delta}$) have exactly the same structure and that consequently the properties described above can be easily extended to Γ and $\bar{\Gamma}$. ■

C. Induction hypothesis

By induction, let us consider the following property $P(q)$ defined for all $1 \leq q \leq m+n$:

$\forall r_q \leq i \leq n, \forall \bar{r}_q \leq \bar{i} \leq m, \forall 1 \leq j \leq n, \forall 1 \leq d \leq m, \forall 1 \leq \bar{j} \leq n, \forall 1 \leq \bar{d} \leq m$, the problem (89)-(100) where $\Omega, \bar{\Omega}, \Gamma$ and $\bar{\Gamma}$ are defined by (102)-(104) has a unique solution $K_{ij}(\cdot, \cdot), L_{id}(\cdot, \cdot), \bar{K}_{i\bar{j}}(\cdot, \cdot), \bar{L}_{i\bar{d}}(\cdot, \cdot) \in L^\infty(\mathcal{T}_0)$.

Initialization : For $q = 1$, we have either $(r_1 = n$ and $\bar{r}_1 = m+1)$ or $(r_1 = n+1$ and $\bar{r}_1 = m)$ due to Theorem 3. Assuming that $r_1 = n$ and $\bar{r}_1 = m+1$, system (89)-(100) rewrites as follow

for $1 \leq j \leq n$

$$\begin{aligned} \lambda_n \partial_x K_{nj}(x, \xi) + \lambda_j \partial_\xi K_{nj}(x, \xi) = & - \sum_{k=1}^n \sigma_{kj}^{++} K_{nk}(x, \xi) \\ & - \sum_{p=1}^m \sigma_{pj}^{--} L_{np}(x, \xi) + K_{nj}(x, \xi) \sigma_{nn}^{++} \end{aligned} \quad (114)$$

for $1 \leq j \leq m$

$$\begin{aligned} \lambda_n \partial_x L_{nj}(x, \xi) - \mu_j \partial_\xi L_{nj}(x, \xi) = & - \sum_{k=1}^m \sigma_{kj}^{--} L_{nk}(x, \xi) \\ & - \sum_{p=1}^n \sigma_{pj}^{+-} K_{np}(x, \xi) + L_{nj}(x, \xi) \sigma_{nn}^{++} \end{aligned} \quad (115)$$

with the corresponding set of boundary conditions. The well-posedness of such system is quite straightforward using [16] or Theorem 3. The initialization still holds for $r_1 = n+1$ and $\bar{r}_1 = m$.

Induction : Let us assume that the property $P(q-1)$ ($1 < q \leq n+m-1$) is true. We consequently have that $\forall r_{q-1} \leq i \leq n, \forall \bar{r}_{q-1} \leq \bar{i} \leq m, \forall 1 \leq j \leq n, \forall 1 \leq d \leq m, \forall 1 \leq \bar{j} \leq n, \forall 1 \leq \bar{d} \leq m, K_{ij}(\cdot, \cdot), L_{id}(\cdot, \cdot), \bar{K}_{i\bar{j}}(\cdot, \cdot)$, and $\bar{L}_{i\bar{d}}(\cdot, \cdot)$ are bounded.

In the following we assume that $\bar{r}_q = \bar{r}_{q-1}$ (and that consequently $r_q = r_{q-1} - 1$). The result still holds if $r_q = r_{q-1}$ and the proof is similar. We denote $i = r_q$. Using the induction hypothesis yields that $\forall 1 \leq \bar{j} \leq n, \forall 1 \leq \bar{d} \leq m, \forall \bar{r}_q = \bar{r}_{q-1} \leq \bar{i} \leq n, \bar{K}_{i\bar{j}}(\cdot, \cdot)$, and $\bar{L}_{i\bar{d}}(\cdot, \cdot)$ are well-posed.

Rewriting equation (89) yields

$$\begin{aligned} -\lambda_i \partial_x K_{ij}(x, \xi) - \lambda_j \partial_\xi K_{ij}(x, \xi) = & \sum_{k=1}^n \sigma_{kj}^{++} K_{ik}(x, \xi) \\ & + \sum_{p=1}^m \sigma_{pj}^{--} L_{ip}(x, \xi) - \sum_{i \leq p \leq m} K_{pj}(x, \xi) \\ & \cdot ((\lambda_p - \lambda_i) K_{ip}(x, x) + \sigma_{ip}^{++}) \\ - \sum_{1 \leq p \leq m} \bar{K}_{pj}(x, \xi) h_{[a_{ip}, 1]}(x) \cdot & ((\lambda_i + \mu_p) L_{ip}(x, x) + \sigma_{ip}^{+-}) \end{aligned} \quad (116)$$

with the boundary conditions

$$K_{ij}(x, 1 - \frac{\bar{\mu}}{\lambda} x) = 0 \quad K_{ij}(x, x) = \frac{\sigma^{++}}{\lambda_i - \lambda_j} \quad i > j$$

The one-but-last sum uses the expression of K_{pj} for $i \leq p \leq m$. This term is known and bounded for $p > i$ (induction assumption). For $p = i$, $\lambda_i = \lambda_p$ and the term $(\lambda_p - \lambda_i) K_{ip}(x_{ij}(x, \xi, s), x_{ij}(x, \xi, s))$ cancels.

Using Corollary 1 and relation (103) it is possible to rewrite the last sum as

$$\sum_{m+1-s_i \leq p \leq m} \bar{K}_{pj}(x, \xi) (\sigma_{ip}^{+-} + (\lambda_i + \mu_p) L_{ip}(x, \xi)) h_{[a_{ij}, 1]}(x) \quad (117)$$

Using the definition of r_i , we have

$$\begin{aligned} s_i \leq s_{i-1} = s_{r_q-1} \leq m+1 - \bar{r}_q \\ \Rightarrow m - s_i \geq \bar{r}_q - 1 \end{aligned} \quad (118)$$

Consequently, the last sum uses the expression of \bar{K}_{pj} for $\bar{r}_q \leq p \leq m$ which is known according to the induction assumption. Therefore, all the non-linearities that could appear at first sight of the kernel equations actually involve terms that have been computed in the previous iterations and that are bounded. We can rewrite (116) as

$$\begin{aligned} -\lambda_i \partial_x K_{ij}(x, \xi) - \lambda_j \partial_\xi K_{ij}(x, \xi) = & \sum_{k=1}^n C_{kj}^{++}(x, \xi) K_{ik}(x, \xi) \\ & + \sum_{k=1}^m C_{kj}^{--}(x, \xi) L_{ik}(x, \xi) ds \end{aligned} \quad (119)$$

where the coefficients C_{kj}^{++} and C_{kj}^{--} are known and bounded (since they are either constants or computed during the previous iteration of the recursion).

Similarly, we can rewrite (90) as

$$\begin{aligned} -\lambda_i \partial_x L_{ij}(x, \xi) + \mu_j \partial_\xi L_{ij}(x, \xi) = & \sum_{k=1}^n C_{kj}^{--}(x, \xi) K_{ik}(x, \xi) \\ & + \sum_{k=1}^m C_{kj}^{+-}(x, \xi) L_{ik}(x, \xi) ds \end{aligned} \quad (120)$$

where the coefficients C_{kj}^{--} and C_{kj}^{+-} are known and bounded. Moreover we have the boundary condition

$$\left(\frac{\mu_j}{\lambda_i} - \frac{\bar{\mu}}{\lambda} \right) L_{ij} \left(x, 1 - \frac{\bar{\mu}}{\lambda} x \right) = 0 \quad (121)$$

and

$$\forall x < a_{ij} = \frac{\lambda_i}{\lambda_i + \mu_j} \quad L_{ij}(x, x) = \frac{\sigma_{ij}^{+-}}{\lambda_i + \mu_j} \quad (122)$$

Each L_{ij} has a discontinuity line defined by $\xi = 1 - \frac{\mu_j}{\lambda_i}x$. The characteristics are integrated in opposite directions on each side of the discontinuity: away from the $\xi = x$ boundary for $\xi \leq 1 - \frac{\mu_j}{\lambda_i}x$ and away from the line $\xi = 1 - \frac{\mu_j}{\lambda_i}x$ for $\xi \geq 1 - \frac{\mu_j}{\lambda_i}x$. Therefore the parameters α and δ of Theorem 3, which have to satisfy (88) for all L_{ij} on the domain on which the equations are considered, vary on each side of the discontinuity of all the kernels. Therefore, in what follows, we define a sequence of triangular domains, depicted on Figure 3, on which there exists α and δ satisfying (88). More precisely, assuming that $a_{i1} \geq \bar{a}$ (this specific case will be presented in Remark XX), for all $k \leq m+1$ such that $a_{ik} < \bar{a}$ (with the convention $a_{i(m+1)} = 0$), consider the domains \mathcal{T}_k :

$$\begin{aligned} \mathcal{T}_k &= \{(x, \xi) | x \leq \xi \quad \xi \leq 1 - \frac{\mu_{k-1}}{\lambda_i}x \quad \xi \geq 1 - \frac{\mu_k}{\lambda_i}x\} \\ \mathcal{T}_{m+1} &= \{(x, \xi) | 0 \leq x \leq \xi \quad \xi \leq 1 - \frac{\mu_m}{\lambda_i}x\} \end{aligned} \quad (123)$$

The equations can be solved successively on these triangles, starting from the rightmost one. Their are represented on Figure 3.

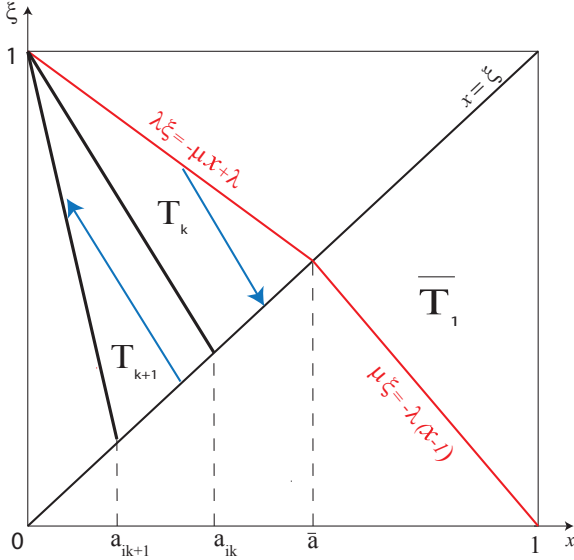


Fig. 3. Representation of the triangles \mathcal{T}_k

The trace of the solution on the boundary of a given \mathcal{T}_k provides boundary conditions of the system considered on \mathcal{T}_{k+1} .

By induction, let us now consider the property $\mathcal{Q}(k)$ defined for all k such that $a_{ik} < \bar{a}$ by: *The system (119)-(122) is well-posed on $\mathcal{T}_k \cap \mathcal{T}_0$.*

Initialization: Let k_0 such that $a_{ik_0} < \bar{a} \leq a_{i(k_0-1)}$. On $\mathcal{T}_{k_0} \cap \mathcal{T}_0$, equations (119) and (120) can be simply

rewritten, for $l = 1 \dots n+m$ as

$$\epsilon_l \partial_x F_l(x, \xi) + \nu_l \partial_\xi F_l(x, \xi) = \Sigma_l(x, \xi) F(x, \xi) \quad (124)$$

where $F = (K_{i,1} \dots K_{i,n}, L_{i,1}, \dots, L_{i,m})^T$. The functions ϵ_l and ν_l are defined according to the location of the boundary condition by

$$\epsilon_l = \begin{cases} -\lambda_i & \text{if } l \leq n \\ -\lambda_i & \text{if } l > n \text{ and } l - n < k_0 \\ +\lambda_i & \text{else} \end{cases} \quad (125)$$

$$\nu_l = \begin{cases} -\lambda_i & \text{if } l \leq n \\ +\mu_l & \text{if } l > n \text{ and } l - n < k_0 \\ -\mu_l & \text{else} \end{cases} \quad (126)$$

The homogeneous system, obtained by taking $\Sigma_l(x, \xi) = 0$ along with the corresponding boundary conditions is well-posed. If we choose α_{k_0} such that

$$\frac{\mu_{k_0} - 1}{\lambda_i} < \alpha_{k_0} = \frac{\mu_{k_0-1} + \mu_{k_0}}{2\lambda_i} < \frac{\mu_{k_0}}{\lambda_i} \quad (127)$$

we easily get

$$\begin{aligned} \alpha_{k_0} \epsilon_l + \nu_l &= \begin{cases} -\alpha_{k_0} \lambda_i - \lambda_l & \text{if } l \leq n \\ -\alpha_{k_0} \lambda_i + \mu_l & \text{if } l > n \text{ and } l - n < k_0 \\ +\alpha_{k_0} \lambda_i - \mu_l & \text{else} \end{cases} \\ &= \begin{cases} \frac{-\mu_{k_0-1} - \mu_{k_0}}{2} - \lambda_l & \text{if } l \leq n \\ \frac{-\mu_{k_0-1} - \mu_{k_0}}{2} + \mu_l & \text{if } l > n \text{ and } l - n < k_0 \\ \frac{+\mu_{k_0-1} + \mu_{k_0}}{2} - \mu_l & \text{else} \end{cases} \end{aligned} \quad (128)$$

In the first case, the result is always negative. If $l - n < k_0$, $\mu_l < \mu_{k_0} < \frac{\mu_{k_0-1} + \mu_{k_0}}{2}$. Consequently, for the second case the result is still negative. The same holds for the third case. Consequently, the two hypothesis of Theorem 3 are verified and we can conclude to the well-posedness of the kernel equations on \mathcal{T}_{k_0} . This concludes the initialization.

Recursion If we assume that $\mathcal{Q}(k)$ holds (for $k_0 \geq k < m$) we can easily prove using Theorem 3 that $\mathcal{Q}(k+1)$ holds. The well-posedness of the homogeneous system is direct using $\mathcal{Q}(k)$ and one can easily check that the second hypothesis of the theorem holds choosing α_{k+1} :

$$\alpha_{k+1} = \frac{\mu_{k+1} + \mu_k}{2} \quad (129)$$

with the convention $\mu_{m+1} = \mu_m + 1$. Moreover this iteration provides us the boundary condition for the next triangle. This concludes the proof.

Remark 9: If $a_{i1} < \bar{a}$, the previous result still holds taking $a_{i0} = \bar{a}$.

This proves the well-posedness of the i^{th} line of the kernels K and J on \mathcal{T}_0 . Consequently $P(q)$ is true and the well-posedness of the kernels K, L, \bar{K}, \bar{L} on \mathcal{T}_0 is proved.

V. INVERTIBILITY OF THE FREDHOLM TRANSFORMATION

Unlike the Volterra transformation, the Fredholm transformation is not always invertible. In [9], the authors prove the invertibility of such a transformation in the case of a first-order integro-differential hyperbolic equation. In [?] the invertibility of the transformation is proved in the scalar case. In this section we use similar arguments (in particular we rely on the Fredholm alternative) to prove the invertibility of our transformation.

1) *Operator formulation of the Fredholm transformation and properties:* In this subsection we rewrite the previous Fredholm transformation using operators. This will lead to some relations verified by the adjoint operators. The Fredholm transformation (53)-(54) can be written as an operator P acting on $\begin{pmatrix} u \\ v \end{pmatrix}$. More precisely we have

$$P = Id - Q \quad (130)$$

$$\begin{pmatrix} \alpha \\ \beta \end{pmatrix} = P \begin{pmatrix} u \\ v \end{pmatrix} \quad (131)$$

where $Q : (L^2(0,1))^{n+m} \rightarrow (L^2(0,1))^{n+m}$ is the integral operator defined by

$$Q \begin{pmatrix} u \\ v \end{pmatrix} = \int_0^1 \begin{pmatrix} Q_{11}(x, \xi)u(t, \xi) + Q_{12}(x, \xi)v(t, \xi) \\ Q_{21}(x, \xi)u(t, \xi) + Q_{22}(x, \xi)v(t, \xi) \end{pmatrix} d\xi \quad (132)$$

Its adjoint is:

$$Q^* \begin{pmatrix} u \\ v \end{pmatrix} = \int_0^1 \begin{pmatrix} Q_{11}(\xi, x)u(t, \xi) + Q_{21}(\xi, x)v(t, \xi) \\ Q_{12}(\xi, x)u(t, \xi) + Q_{22}(\xi, x)v(t, \xi) \end{pmatrix} d\xi \quad (133)$$

One can easily check that:

$$Q^*(D(A^*)) \subset D(A^*) \quad (134)$$

The control $\begin{pmatrix} U \\ V \end{pmatrix}$ can also be rewritten using operators

$$\begin{pmatrix} U \\ V \end{pmatrix} = \Gamma \begin{pmatrix} u \\ v \end{pmatrix} \quad (135)$$

with

$$\Gamma \begin{pmatrix} u \\ v \end{pmatrix} = \int_0^1 \begin{pmatrix} Q_{11}(0, \xi)u(t, \xi) + Q_{12}(0, \xi)v(t, \xi) \\ Q_{21}(1, \xi)u(t, \xi) + Q_{22}(1, \xi)v(t, \xi) \end{pmatrix} d\xi \quad (136)$$

Using (43) and (131) yields

$$\frac{d}{dt} \begin{pmatrix} \alpha \\ \beta \end{pmatrix} = A_0 \begin{pmatrix} \alpha \\ \beta \end{pmatrix} = A_0 P \begin{pmatrix} u \\ v \end{pmatrix} \quad (137)$$

Moreover using (11) and (131) we get

$$\begin{aligned} \frac{d}{dt} \begin{pmatrix} \alpha \\ \beta \end{pmatrix} &= \frac{d}{dt} (P \begin{pmatrix} u \\ v \end{pmatrix}) \\ &= PA \begin{pmatrix} u \\ v \end{pmatrix} + PB\Gamma \begin{pmatrix} u \\ v \end{pmatrix} \end{aligned} \quad (138)$$

Consequently P and Γ satisfy the following relation:

$$A_0 P = PA + PB\Gamma \quad (139)$$

Taking the adjoints, this is equivalent to

$$P^* A_0^* = A^* P^* + \Gamma^* B^* P^* \quad (140)$$

2) *The Fredholm alternative:* We give first the following useful lemmas:

Lemma 7: $\ker P^* \subset D(A_0^*) = D(A^*)$

Proof: Let us consider $z \in \ker P^*$. Consequently we have $P^* z = 0$. We can rewrite it

$$\begin{pmatrix} z_1 \\ z_2 \end{pmatrix} = \int_0^1 \begin{pmatrix} Q_{11}(\xi, x)z_1(t, \xi) + Q_{21}(\xi, x)z_2(t, \xi) \\ Q_{12}(\xi, x)z_1(t, \xi) + Q_{22}(\xi, x)z_2(t, \xi) \end{pmatrix} d\xi \quad (141)$$

If we evaluate the first line for $x = 1$ and the second one for $x = 0$, using the fact that $Q_{11}(\xi, 0) = Q_{21}(\xi, 0) = Q_{12}(\xi, 1) = Q_{22}(\xi, 1) = 0$, we get

$$z_1(1) = z_2(0) = 0 \quad (142)$$

Consequently $z \in D(A_0^*)$ and we can write

$$\ker P^* \subset D(A_0^*) \quad (143)$$

Lemma 8: $\ker P^* \subset \ker B^*$

Proof: Let us consider $z \in \ker P^*$. Consequently we have $P^* z = 0$. We can rewrite it

$$\begin{pmatrix} z_1 \\ z_2 \end{pmatrix} = \int_0^1 \begin{pmatrix} Q_{11}(\xi, x)z_1(t, \xi) + Q_{21}(\xi, x)z_2(t, \xi) \\ Q_{12}(\xi, x)z_1(t, \xi) + Q_{22}(\xi, x)z_2(t, \xi) \end{pmatrix} d\xi \quad (144)$$

If we evaluate the first line for $x = 0$ and the second one for $x = 1$, using the fact that $Q_{11}(\xi, 1) = Q_{21}(\xi, 1) = Q_{12}(\xi, 0) = Q_{22}(\xi, 0) = 0$, we get

$$z_1(0) = z_2(1) = 0 \quad (145)$$

Consequently $z \in \ker B^*$ and we can write

$$\ker P^* \subset \ker B^* \quad (146)$$

Lemma 9: $\forall \lambda \in \Re \ker(\lambda Id - A_0^*) \cap \ker B^* = \{0\}$

Proof: Let us consider $\nu \in \Re$ and $z \in \ker(\nu Id - A_0^*) \cap \ker B^* = \{0\}$. Consequently we have

$$\begin{pmatrix} z_1(t, x)_x^T \Lambda^+ + z_1(t, x)^T \Omega + z_2(t, x)^T \bar{\Gamma} - \nu z_1(t, x)^T \\ -z_2(t, x)_x^T \Lambda^- + z_2(t, x)^T \bar{\Omega} + z_1(t, x)^T \Gamma - \nu z_2(t, x)^T \end{pmatrix} = \begin{pmatrix} 0 \\ 0 \end{pmatrix} \quad (147)$$

with the boundary conditions

$$z_1(0) = z_2(0) = 0 \quad (148)$$

Consequently (using the Cauchy-Lipschitz' theorem) we have $z = \begin{pmatrix} 0 \\ 0 \end{pmatrix}$

We can now state the following theorem

Theorem 5: The map $P^* = Id - Q^*$ is invertible

Proof: Since Q^* is a compact operator we can use the Fredholm alternative (e.g [4]): $Id_2 - Q^*$ is either non-injective or surjective. Consequently it suffices to prove that P^* is injective. In addition, the Fredholm alternative also gives [4]

$$\dim \ker(Id - Q^*) < +\infty \quad (149)$$

By contradiction we assume that $\ker P^* \neq \{0\}$. We first prove that $\ker P^*$ is stable by A_0^* . We have $\ker P^* \subset D(A_0^*)$. Let then consider $z \in \ker P^*$. Using (140) we can obtain

$$P^* A_0^* z = 0 \quad (150)$$

We thus have $A_0^* z \in \ker P^*$. Consequently the restriction $A_{0|_{\ker P^*}}^*$ of A_0^* to $\ker P^*$ is a linear operator from $\ker P^*$ to $\ker P^*$. Since the dimension of $\ker P^*$ is finite we can find at least one eigenvalue ν . Let $e \in \ker P^*$ be a corresponding eigenvector (by definition $e \neq 0$). We have $e \in \ker P^*$ and so $e \in \ker B^*$. Moreover we have $A_0^* e = \nu e$. Consequently

$$e \in \ker(\nu Id - A_0^*) \cap \ker B^* \quad (151)$$

which contradicts Lemma 5 and concludes the proof. ■

VI. CONTROL LAW AND MAIN RESULTS

We now state the main stabilization result as follows:

Theorem 6: System (1)-(2) with the following feedback control laws

$$U(t) = - \int_0^1 (K(0, \xi)u(t, \xi) + L(0, \xi)v(t, \xi))d\xi \quad (152)$$

$$V(t) = - \int_0^1 (\bar{M}(1, \xi)u(t, \xi) + \bar{N}(1, \xi)v(t, \xi))d\xi \quad (153)$$

where K, L and \bar{M}, \bar{N} are defined by (61)-(66) and (79)-(84), reaches its zero equilibrium in finite time t_F , where t_F is given by (18). The zero equilibrium is exponentially stable in the L^2 -sense.

Proof: Notice that evaluating (48) at $x = 0$ yields (152) and evaluating (49) at $x = 1$ yields (153). Since the kernels are invertible, there exists a unique operator \mathcal{S} such that

$$\begin{pmatrix} u \\ v \end{pmatrix} = \mathcal{S} \begin{pmatrix} \alpha \\ \beta \end{pmatrix} \quad (154)$$

Applying Lemma 2 implies that (α, β) go to zero in finite time t_F , therefore (u, v) converge to zero in finite time t_F . ■

VII. UNCOLLOCATED OBSERVER DESIGN AND OUTPUT FEEDBACK CONTROLLER

In this section we design an observer that relies on the measurements of u at the right boundary and v at the left boundary, i.e we measure

$$y_1(t) = u(t, 1) \quad (155)$$

$$y_2(t) = v(t, 0) \quad (156)$$

Then, using the estimates given by our observer and the control law (152)-(153), we derive an output feedback controller.

A. Observer design

The observer equations reads as follows

$$\begin{aligned} \hat{u}_t(t, x) + \Lambda^+ \hat{u}_x(t, x) &= \Sigma^{++} \hat{u}(t, x) + \Sigma^{+-} \hat{v}(t, x) \\ &\quad - P_{11}(x)(\hat{u}(t, 1) - u(t, 1)) - P_{12}(\hat{v}(t, 0) - v(t, 0)) \end{aligned} \quad (157)$$

$$\begin{aligned} \hat{v}_t(t, x) + \Lambda^- \hat{v}_x(t, x) &= \Sigma^{-+} \hat{u}(t, x) + \Sigma^{--} \hat{v}(t, x) \\ &\quad - P_{21}(x)(\hat{u}(t, 1) - u(t, 1)) - P_{22}(\hat{v}(t, 0) - v(t, 0)) \end{aligned} \quad (158)$$

with the boundary conditions

$$\hat{u}(t, 0) = U(t), \quad \hat{v}(t, 1) = V(t) \quad (159)$$

where $P_{11}(\cdot)$, $P_{21}(\cdot)$, $P_{12}(\cdot)$ and $P_{22}(\cdot)$ have yet to be designed. This yield the following error system

$$\begin{aligned} \tilde{u}_t(t, x) + \Lambda^+ \tilde{u}_x(t, x) &= \Sigma^{++} \tilde{u}(t, x) + \Sigma^{+-} \tilde{v}(t, x) \\ &\quad - P_{11}(x)\tilde{u}(t, 1) - P_{12}(x)\tilde{v}(t, 0) \end{aligned} \quad (160)$$

$$\begin{aligned} \tilde{v}_t(t, x) + \Lambda^- \tilde{v}_x(t, x) &= \Sigma^{-+} \tilde{u}(t, x) + \Sigma^{--} \tilde{v}(t, x) \\ &\quad - P_{21}(x)\tilde{u}(t, 1) - P_{22}(x)\tilde{v}(t, 0) \end{aligned} \quad (161)$$

with the boundary conditions

$$\tilde{u}(t, 0) = 0, \quad \tilde{v}(t, 1) = 0 \quad (162)$$

B. Target system design

We map the system (1)-(3) to the following system

$$\alpha_t(t, x) + \Lambda^+ \alpha_x(t, x) = \Omega(x)\alpha(t, x) + \Gamma(x)\beta(t, x) \quad (163)$$

$$\beta_t(t, x) - \Lambda^- \beta_x(t, x) = \bar{\Omega}(x)\beta(t, x) + \bar{\Gamma}(x)\alpha(t, x) \quad (164)$$

with the following boundary conditions

$$\alpha(t, 0) = 0 \quad \beta(t, 1) = 0 \quad (165)$$

while Ω and $\bar{\Omega} \in L^\infty(0, 1)$ are upper triangular matrices with the following structure

$$\Omega(x) = \begin{pmatrix} \omega_{1,1}(x) & \omega_{1,2}(x) & \dots & \omega_{1,n}(x) \\ 0 & \ddots & \ddots & \vdots \\ \vdots & \ddots & \omega_{n-1,n-1}(x) & \omega_{n-1,n}(x) \\ 0 & \dots & 0 & \omega_{n,n}(x) \end{pmatrix} \quad (166)$$

$$\bar{\Omega}(x) = \begin{pmatrix} \bar{\omega}_{1,1}(x) & \bar{\omega}_{1,2}(x) & \dots & \bar{\omega}_{1,m}(x) \\ 0 & \ddots & \ddots & \vdots \\ \vdots & \ddots & \bar{\omega}_{m-1,m-1}(x) & \bar{\omega}_{m-1,m}(x) \\ 0 & \dots & 0 & \bar{\omega}_{m,m}(x) \end{pmatrix} \quad (167)$$

The coefficients of the matrices $\Gamma(x)$ and $\bar{\Gamma}(x)$ are defined by

$$\begin{aligned} \forall 1 \leq i \leq n \quad \forall 1 \leq j \leq m \\ \Gamma_{ij}(x) = \begin{cases} 0 & \text{if } a_{ij} > 1 - \bar{a} \\ \gamma_{ij}(x)h_{[a_{ij}, 1]}(x) & \text{else} \end{cases} \end{aligned} \quad (168)$$

$$\forall 1 \leq i \leq m \quad \forall 1 \leq j \leq n$$

$$\bar{\Gamma}_{ij}(x) = \begin{cases} 0 & \text{if } a_{ij} \leq 1 - \bar{a} \\ \bar{\gamma}_{ij}(x)h_{[0, a_{ji}]}(x) & \text{else} \end{cases} \quad (169)$$

where, for any interval I , h_I is defined by

$$h_I(x) = \begin{cases} 1 & \text{if } x \in I \\ 0 & \text{else} \end{cases} \quad (170)$$

We recall the following result

Lemma 10: The zero equilibrium of (163)-(164) with boundary conditions (165) and initial conditions $(\alpha^0, \beta^0) \in \mathcal{L}^2([0, 1])$ is exponentially stable in the \mathcal{L}^2 sense.

C. Fredholm transformation

1) *Definition of the transformation:* In order to map the system (160)-(161) to the target system (163)-(165), we use the following transformation

$$\begin{aligned} u(t, x) &= \alpha(t, x) \\ &+ h_{[0, 1-\bar{a}]}(x) \left(\int_0^x (K_1(x, \xi)\alpha(t, \xi) + L_1(x, \xi)\beta(t, \xi)) d\xi \right. \\ &+ \int_{-\frac{\bar{\mu}}{\bar{\lambda}}x+1}^1 M_1(x, \xi)\alpha(t, \xi) + N_1(x, \xi)\beta(t, \xi) d\xi \\ &+ h_{[1-\bar{a}, 1]}(x) \left(\int_0^{-\frac{\bar{\lambda}}{\bar{\mu}}(x-1)} (K_1(x, \xi)\alpha(t, \xi) + L_1(x, \xi)\beta(t, \xi)) d\xi \right. \\ &+ \int_x^1 M_1(x, \xi)\alpha(t, \xi) + N_1(x, \xi)\beta(t, \xi) d\xi \end{aligned} \quad (171)$$

$$\begin{aligned} v(t, x) &= \beta(t, x) \\ &+ h_{[0, 1-\bar{a}]}(x) \left(\int_0^x (\bar{K}_1(x, \xi)\alpha(t, \xi) + \bar{L}_1(x, \xi)\beta(t, \xi)) d\xi \right. \\ &+ \int_{-\frac{\bar{\mu}}{\bar{\lambda}}x+1}^1 \bar{M}_1(x, \xi)\alpha(t, \xi) + \bar{N}_1(x, \xi)\beta(t, \xi) d\xi \\ &+ h_{[1-\bar{a}, 1]}(x) \left(\int_0^{-\frac{\bar{\lambda}}{\bar{\mu}}(x-1)} (\bar{K}_1(x, \xi)\alpha(t, \xi) + \bar{L}_1(x, \xi)\beta(t, \xi)) d\xi \right. \\ &+ \int_x^1 \bar{M}_1(x, \xi)\alpha(t, \xi) + \bar{N}_1(x, \xi)\beta(t, \xi) d\xi \end{aligned} \quad (172)$$

We define the following triangular domains

$$\mathcal{T}'_0 = \{(x, \xi) | 0 < x < 1, \quad 1 \geq \xi \geq x \quad \xi \geq -\frac{\bar{\mu}}{\bar{\lambda}}x + 1\} \quad (173)$$

$$\mathcal{T}_1 = \{(x, \xi) | 0 < x < 1, \quad 0 \leq \xi \leq x \quad \xi \leq -\frac{\bar{\lambda}}{\bar{\mu}}(x-1)\} \quad (174)$$

The kernels K_1, L_1, \bar{K}_1 and \bar{L}_1 are defined on \mathcal{T}'_1 . M_1, N_1, \bar{M}_1 and \bar{N}_1 are defined on $\bar{\mathcal{T}}'_0$. They are continuous in their domains of assumed definition. They all have yet to be defined.

2) *Kernel equations:* Differentiating the Fredholm transformation (171)-(172) with respect to time and space yields the following system of equations.

$$0 = \Sigma^{++} - \Lambda^+ K_1(x, x) + K_1(x, x) \Lambda^+ - \Omega(x) \quad (175)$$

$$0 = \Sigma^{+-} - \Lambda^+ L_1(x, x) - L_1(x, x) \Lambda^- - \Gamma(x) \quad (176)$$

$$0 = \Sigma^{-+} + \Lambda^- \bar{K}_1(x, x) + \bar{K}_1(x, x) \Lambda^+ - \bar{\Gamma}(x) \quad (177)$$

$$0 = \Sigma^{--} + \Lambda^- \bar{L}_1(x, x) - \bar{L}_1(x, x) \Lambda^- - \bar{\Omega}(x) \quad (178)$$

$$0 = -\frac{\bar{\lambda}}{\bar{\mu}} \Lambda^+ K_1(x, -\frac{\bar{\lambda}}{\bar{\mu}}(x-1)) - K_1(x, -\frac{\bar{\lambda}}{\bar{\mu}}(x-1)) \Lambda^+ \quad (179)$$

$$0 = -\frac{\bar{\lambda}}{\bar{\mu}} \Lambda^+ L_1(x, -\frac{\bar{\lambda}}{\bar{\mu}}(x-1)) - L_1(x, -\frac{\bar{\lambda}}{\bar{\mu}}(x-1)) \Lambda^- \quad (180)$$

$$0 = \frac{\bar{\lambda}}{\bar{\mu}} \Lambda^- \bar{K}_1(x, -\frac{\bar{\lambda}}{\bar{\mu}}(x-1)) - \bar{K}_1(x, -\frac{\bar{\lambda}}{\bar{\mu}}(x-1)) \Lambda^+ \quad (181)$$

$$0 = \frac{\bar{\lambda}}{\bar{\mu}} \Lambda^- L_1(x, -\frac{\bar{\lambda}}{\bar{\mu}}(x-1)) + \bar{L}_1(x, -\frac{\bar{\lambda}}{\bar{\mu}}(x-1)) \Lambda^- \quad (182)$$

$$\begin{aligned} 0 &= \Lambda^+ (K_1)_x(x, \xi) + (K_1)_\xi(x, \xi) \Lambda^+ - \Sigma^{++} K_1(x, \xi) \\ &- \Sigma^{+-} \bar{K}_1(x, \xi) + K_1(x, \xi) \Omega(x) + L_1(x, \xi) \bar{\Gamma}(x) \end{aligned} \quad (183)$$

$$\begin{aligned} 0 &= \Lambda^+ (L_1)_x(x, \xi) + (L_1)_\xi(x, \xi) \Lambda^- - \Sigma^{++} L_1(x, \xi) \\ &- \Sigma^{+-} \bar{L}_1(x, \xi) + L_1(x, \xi) \bar{\Omega}(x) + K_1(x, \xi) \Gamma(x) \end{aligned} \quad (184)$$

$$\begin{aligned} 0 &= -\Lambda^- (\bar{K}_1)_x(x, \xi) + (\bar{K}_1)_\xi(x, \xi) \Lambda^+ - \Sigma^{--} \bar{K}_1(x, \xi) \\ &- \Sigma^{-+} K_1(x, \xi) + \bar{K}_1(x, \xi) \Omega(x) + \bar{L}_1(x, \xi) \bar{\Gamma}(x) \end{aligned} \quad (185)$$

$$\begin{aligned} 0 &= -\Lambda^- (\bar{L}_1)_x(x, \xi) - (\bar{L}_1)_\xi(x, \xi) \Lambda^- - \Sigma^{--} \bar{L}_1(x, \xi) \\ &- \Sigma^{-+} L_1(x, \xi) + \bar{L}_1(x, \xi) \Omega(x) + \bar{K}_1(x, \xi) \Gamma(x) \end{aligned} \quad (186)$$

A similar system can be obtained for the kernels M, N, \bar{M} and \bar{N} . Moreover the observer gains are given by

$$P_{11}(x) = M_1(1, x) \Lambda^+ \quad (187)$$

$$P_{11}(x) = \bar{M}_1(1, x) \Lambda^+ \quad (188)$$

$$P_{12}(x) = L_1(0, x) \Lambda^- \quad (189)$$

$$P_{22}(x) = \bar{L}_1(0, x) \Lambda^- \quad (190)$$

The complete proof of the well-posedness of system (175)-(186) is not detailed here. However, one can notice that considering the following alternatives variables $(\chi, y) = (1-\xi, 1-x)$ the triangle \mathcal{T}'_0 is mapped on \mathcal{T}_0 and the triangle \mathcal{T}'_1 is mapped on \mathcal{T}_1 . The corresponding kernel equations (or at least their transposed) are extremely similar to the ones obtained in Section III and consequently the well-posedness proof detailed in Section IV can easily be adjusted to assess the well-posedness of system (175)-(186).

D. Output feedback controller

The estimates can be used in a observer-controller to derive an output feedback law yielding finite-time stability of the zero equilibrium

Lemma 11: Consider the system composed of (1)-(3) and target system (157)-(159) with the following control law

$$U(t) = - \int_0^1 (K(0, \xi) \hat{u}(t, \xi) + L(0, \xi) \hat{v}(t, \xi)) d\xi \quad (191)$$

$$V(t) = - \int_0^1 (\bar{M}(1, \xi) \hat{u}(t, \xi) + \bar{N}(1, \xi) \hat{v}(t, \xi)) d\xi \quad (192)$$

where K, L and \bar{M}, \bar{N} are defined by (61)-(66) and (79)-(84). Its solutions (u, v, \hat{u}, \hat{v}) converge in finite time to zero

Proof: The convergence of the observer error states \tilde{u}, \tilde{v} to zero for $t_F \leq t$ is ensured by Theorem 7, along with the existence of the backstepping transformation. Thus, once $t_F \leq t$, $v(t, 0) = \hat{v}(t, 0)$ and one can use Theorem 6. Therefore for $2t_F \leq t$, one has $(\tilde{u}, \tilde{v}, \hat{u}, \hat{v}) \equiv 0$ which yields $(u, v) \equiv 0$. ■

VIII. SIMULATION RESULTS

In this section we illustrate our results with simulations on a toy problem. The algorithm we use follows the proof of Theorem 1. It solves the equations (89)-(105) transforming them into integral equations, computing the characteristic lines and finding the fixed point, solution of the kernel equations. These kernels are then used to compute the control law. The numerical values of the parameters are as follow.

$$n = m = 2, \quad \lambda_1 = 2, \quad \lambda_2 = 4 \quad \mu_1 = 2, \quad \mu_2 = 5 \quad (193)$$

$$\Sigma^{++} = \begin{pmatrix} 1 & 1 \\ 1 & 1 \end{pmatrix} \quad \Sigma^{+-} = \begin{pmatrix} 1 & 1 \\ 1 & 1 \end{pmatrix} \quad (194)$$

$$\Sigma^{-+} = \begin{pmatrix} 2 & 2 \\ 2 & 2 \end{pmatrix} \quad \Sigma^{--} = \begin{pmatrix} 2 & 2 \\ 2 & 2 \end{pmatrix} \quad (195)$$

The parameters values are chosen such that

- the system is unstable, in particular not stabilizable by a static feedback law, and
- there is a large benefit in using the presented result compared to [2] since the minimum time $t_{F1} = \max(\frac{1}{\lambda_1}, \frac{1}{\mu_1}) = 0.5$ is the half of $t_{F2} = \frac{1}{\lambda_1} + \frac{1}{\mu_1} = 1$.

Figure 4 pictures the \mathcal{L}^2 -norm of the state (u, v) in open loop, using the control law (152)-(153) presented in this paper and using only a one-sided control-law (with only two actuators) based on the one developed in [2]. While the system in open loop is unstable (the \mathcal{L}^2 -norm diverges), it converges in minimum time $t_{F1} = \max\{\frac{1}{\lambda}, \frac{1}{\mu}\} = 0.5$ when controller (152)-(153) is applied, as expected from Theorem 6 and in time $t_{F2} = \frac{1}{\lambda} + \frac{1}{\mu} = 1$ when the controller from [2] is applied. Figure 5 pictures the total control effort $\bar{U}(t)$ defined by $\bar{U}(t) = U_1^2(t) + U_2^2(t)$ in the case we have only a one-boundary controller and defined by $\bar{U}(t) = U_1^2(t) + U_2^2(t) + V_1^2(t) + V_2^2(t)$ in the case we have a two-boundary controller. One can notice that the control efforts are equivalent.

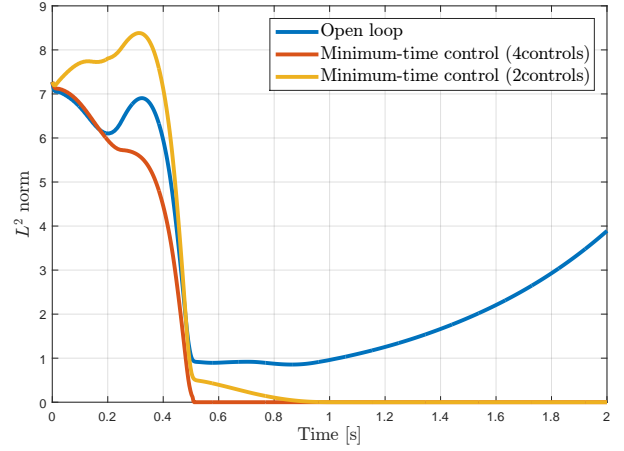


Fig. 4. Time evolution of the L2-norm in open loop and using two different controllers

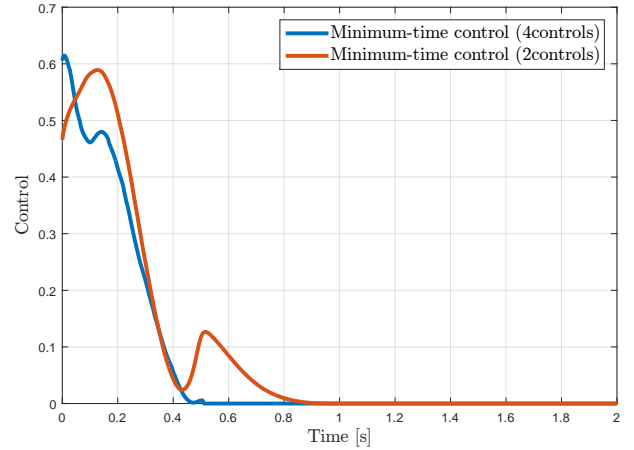


Fig. 5. Controller dynamics

IX. CONCLUDING REMARK

Using a backstepping approach we have presented a stabilizing boundary feedback law for a general class of linear first-order system controlled in both boundaries. Moreover, the zero equilibrium of the system is reached in minimum time t_F which is the largest time between the two transport times in each direction.

Besides, the presented result narrows the gap with the theoretical controllability results of [19]. These results, although they do not provide explicit control law, ensure exact minimum-time controllability with less control inputs than what is currently achievable using backstepping. More generally, this raises the question of the links between controllability and stabilization by backstepping. In particular future works will consider first-order systems with a smaller number of controls in each boundary.

APPENDIX

In this appendix, we prove Theorem 3. Assume that the assumptions of Theorem 3 hold then the system (85) with boundary conditions (87) has a unique solution $F \in$

$L^\infty(\mathcal{D})$. Classically (see [17] and [24]), the proof follows three steps:

- First, we compute the characteristic lines
- In each domain the equations are transformed into integral equations.
- Finally, a method of successive approximations is used to find a solution to the integral equations.

A. Transformation into integral equations

The first assumption of Theorem 3 yields the existence and uniqueness of characteristic curves defined as follows. For each $1 \leq j \leq n+m$ and $(x, \xi) \in \mathcal{D}$, we now define the following characteristic lines $(x_j(x, \xi, \cdot), \xi_j(x, \xi, \cdot))$ corresponding to equation (85)

$$\begin{cases} \frac{dx_j}{ds}(x, \xi, s) = \epsilon_j & s \in [0, s_j^F(x, \xi)] \\ x_j(x, \xi, 0) = x_j^0(x, \xi), & x_j(x, \xi, s_j^F(x, \xi)) = x \end{cases} \quad (196)$$

$$\begin{cases} \frac{d\xi_j}{ds}(x, \xi, s) = \nu_j & s \in [0, s_j^F(x, \xi)] \\ \xi_j(x, \xi, 0) = \xi_j^0(x, \xi), & \xi_j(x, \xi, s_j^F(x, \xi)) = \xi \end{cases} \quad (197)$$

These lines originate at the point $(x_j^0(x, \xi), \xi_j^0(x, \xi))$ located on the boundary of the domain and terminate on (x, ξ) . Integrating (85) along these characteristics and using boundary conditions (87) yields

$$F_j(x, \xi) = f_j(M_j^0(x, \xi, s)) + \int_0^{s_j^F(x, \xi)} \Sigma_j(M_j(x, \xi, s)) F(M_j(x, \xi, s)) ds \quad (198)$$

where we denote $M_j(x, \xi, s) = (x_j(x, \xi, s), \xi_j(x, \xi, s))$ and $M_j^0(x, \xi, s) = (x_j^0(x, \xi, s), \xi_j^0(x, \xi, s))$

B. Method of successive approximations

In order to solve (198) we use the method of successive approximations. We define

$$\Phi_j[F](x, \xi) = \int_0^{s_j^F(x, \xi)} \Sigma_j(M_j(x, \xi, s)) F(M_j(x, \xi, s)) ds \quad (199)$$

We now construct the sequence F^p defined by

$$\begin{aligned} F^0(x, \xi) &= 0 \\ F^{p+1}(x, \xi) &= \begin{pmatrix} f_1(M_1^0(x, \xi, s_j)) \\ \vdots \\ f_{n+m}(M_{(n+m)}^0(x, \xi, s_j)) \end{pmatrix} \\ &\quad + \begin{pmatrix} \Phi_1[F^p](x, \xi) \\ \vdots \\ \Phi_{(n+m)}[F^p](x, \xi) \end{pmatrix} \end{aligned} \quad (200)$$

Consequently, if the sequence F^p has a limit, then this limit is a solution of the integral equation and therefore of the original system.

We define the increment $\Delta F^p = F^p - F^{p-1}$. Provided the limit exists one has

$$F(x, \xi) = \lim_{p \rightarrow +\infty} F^p(x, \xi) = \sum_{p=0}^{+\infty} \Delta F^p(x, \xi) \quad (202)$$

We now prove the convergence of the series.

C. Convergence of the successive approximations series

The proof of convergence is based on the following Lemmas.

Lemma 12: Assume that (88) holds. then for all $j = 1 \dots n+m$, $(x, \xi) \in \mathcal{D}$, the following function is strictly increasing

$$\phi_{x, \xi} : s \in [0, s_j^F(x, \xi)] \mapsto -\alpha x_j(x, \xi, s) - \xi_j(x, \xi, s) + (\alpha + 1) \quad (203)$$

Proof: The proof is trivial. Recalling (88) yields

$$\phi'_{x, \xi}(s) = -\alpha \epsilon_j - \nu_j > 0 \quad (204)$$

This concludes the proof. \blacksquare

Lemma 13: For all $j = 1 \dots n+m$ the following inequalities hold

$$\begin{aligned} &\int_0^{s_j^F(x, \xi)} (-\alpha x_{ij}(x, \xi, s) - \xi_{ij}(x, \xi, s) + (\alpha + 1))^p ds \\ &\leq \frac{1}{\delta} \frac{((\alpha + 1) - \alpha x - \xi)^{p+1}}{p+1} \end{aligned} \quad (205)$$

Proof: Consider the following change of variables

$$\tau = \phi_{x, \xi}(s) \quad (206)$$

It yields

$$\begin{aligned} &\int_0^{s_j^F(x, \xi)} (-\alpha x_j(x, \xi, s) - \xi_j(x, \xi, s) + (\alpha + 1))^p ds \\ &= \int_{-\alpha x_j^0(x, \xi) - \xi_j^0(x, \xi) + 2}^{-\alpha x - \xi + 2} \frac{\tau^p d\tau}{-\alpha \epsilon_j - \nu_j} \end{aligned} \quad (207)$$

Using (88) this yields

$$\begin{aligned} &\int_0^{s_j^F(x, \xi)} (\alpha x_j(x, \xi, s) + \xi_j(x, \xi, s))^p ds \\ &< \frac{(-\alpha x - \xi + (\alpha + 1))^{p+1}}{\delta(p+1)} \\ &\quad - \frac{(-\alpha x_j^0(x, \xi) - \xi_j^0(x, \xi) + (\alpha + 1))^{p+1}}{\delta(p+1)} \end{aligned} \quad (208)$$

Since $(x_j^0(x, \xi), \xi_j^0(x, \xi)) \in \mathcal{D}$ and since $\alpha > 0$, one has $-\alpha x_j^0(x, \xi) - \xi_j^0(x, \xi) + \alpha + 1 \geq 0$ which yields the result. \blacksquare

Lemma 14: Let $M > 0$ be such that

$$M > \bar{\Sigma} \delta \quad (209)$$

where $\bar{\Sigma}$ is defined as

$$\bar{\Sigma} = \max_{(x, \xi) \in \mathcal{D}} \max_{\|F\| \neq 0} \frac{\|\Sigma(x, \xi)F\|}{\|F\|} \quad (210)$$

If for some $1 \leq q$ and some $\bar{f} > 0$ one has, for all $(x, \xi) \in \mathcal{T}_0$

$$\forall j = 1 \dots m+n \quad |\Delta F_j^p(x, \xi)| \leq \frac{M^p (-\alpha x - \xi + (\alpha + 1))^p}{p!} \quad (211)$$

Then one has $\forall j = 1 \dots m+n$

$$|\Delta F_j^{p+1}(x, \xi)| \leq \frac{M^{p+1} (-\alpha x - \xi + (\alpha + 1))^{p+1}}{(p+1)!} \quad (212)$$

Proof: Assume that (211) holds for some fixed $1 \leq p$. Let us consider $1 \leq j \leq (m+n)$.

$$\begin{aligned} |\Delta F_j^{p+1}(x, \xi)| &= |\Phi_j[\Delta F^p](x, \xi)| \\ &< \int_0^{s_j^F(x, \xi)} |\Sigma_j(M_{ij}(x, \xi, s_j)) \Delta F^p(M_j(x, \xi, s_j))| ds \end{aligned} \quad (213)$$

Using (211) this yields

$$\begin{aligned} |\Delta F_j^{p+1}(x, \xi)| &< \bar{\Sigma} \int_0^{s_j^F(x, \xi)} \bar{f} M^p \\ &\quad \frac{((\alpha+1) - \alpha x_j(x, \xi, s) - \xi_j(x, \xi, s))^p}{p!} ds \\ &< \bar{f} \frac{\bar{\Sigma} M^p (-\alpha x - \xi + (\alpha+1))^{p+1}}{\delta (p+1)!} \end{aligned} \quad (214)$$

which yields the result using (209) ■

Proof: We now prove the Initialization. Denoting

$$\bar{f} = \max_{(x, \xi) \in \mathcal{T}_0} \max_{j=1 \dots n+m} |f_j(x, \xi)| \quad (215)$$

one has

$$\forall j = 1 \dots n+m \quad |\Delta F_j^0(x, \xi)| = |f_j(M_j^0(x, \xi))| < \bar{f} \quad (216)$$

Then, using Lemma 10, one can prove by recursion that

$$\sum_{p=0}^{+\infty} |\Delta F^p(x, \xi)| < \bar{f} e^{M(-\alpha x - \xi + (\alpha+1))} \quad (217)$$

Defining F as

$$F(x, \xi) = \sum_{p=0}^{+\infty} \Delta F^p(x, \xi) = \lim_{p \rightarrow \infty} F^p(x, \xi) \quad (218)$$

and taking the limit $p \rightarrow \infty$ in (201) yields the result. ■

REFERENCES

- [1] Saurabh Amin, Falk M Hante, and Alexandre M Bayen, *On stability of switched linear hyperbolic conservation laws with reflecting boundaries*, Hybrid Systems: Computation and Control, Springer, 2008, pp. 602–605.
- [2] Jean Auriol and Florent Di Meglio, *Minimum time control of heterodirectional linear coupled hyperbolic pdes*, arXiv preprint arXiv:1510.04424 (2015).
- [3] G Bastin and JM Coron, *Stability and boundary stabilization of 1-d hyperbolic systems*, Preprint (2015).
- [4] Haim Brezis, *Functional analysis, sobolev spaces and partial differential equations*, Springer Science & Business Media, 2010.
- [5] Felipe Castillo Buenaventura, Emmanuel Witrant, Christophe Prieur, and Luc Dugard, *Dynamic boundary stabilization of hyperbolic systems*, 51st IEEE Conference on Decision and Control (CDC 2012), 2012, pp. n-c.
- [6] Jean-Michel Coron, *Control and nonlinearity*, no. 136, American Mathematical Soc., 2009.
- [7] Jean-Michel Coron, Georges Bastin, and Brigitte d’Andréa Novel, *Dissipative boundary conditions for one-dimensional nonlinear hyperbolic systems*, SIAM Journal on Control and Optimization **47** (2008), no. 3, 1460–1498.
- [8] Jean-Michel Coron, Brigitte d’Andréa Novel, and Georges Bastin, *A lyapunov approach to control irrigation canals modeled by saint-venant equations*, Proc. European Control Conference, Karlsruhe, 1999.
- [9] Jean-Michel Coron, Long Hu, and Guillaume Olive, *Stabilization and controllability of first-order integro-differential hyperbolic equations*, arXiv preprint arXiv:1511.01078 (2015).
- [10] Jean-Michel Coron, Rafael Vazquez, Miroslav Krstic, and Georges Bastin, *Local exponential stabilization of a 2\times2 quasilinear hyperbolic system using backstepping*, SIAM Journal on Control and Optimization **51** (2013), no. 3, 2005–2035.
- [11] Jonathan de Halleux, Christophe Prieur, J-M Coron, Brigitte d’Andréa Novel, and Georges Bastin, *Boundary feedback control in networks of open channels*, Automatica **39** (2003), no. 8, 1365–1376.
- [12] Florent Di Meglio, *Dynamics and control of slugging in oil production*, Ph.D. thesis, École Nationale Supérieure des Mines de Paris, 2011.
- [13] S Djordjevic, OH Bosgra, PMJ Van den Hof, and Dimitri Jeltsema, *Boundary actuation structure of linearized two-phase flow*, American Control Conference (ACC), 2010, IEEE, 2010, pp. 3759–3764.
- [14] Stéphane Dudret, Karine Beauchard, Fouad Ammouri, and Pierre Rouchon, *Stability and asymptotic observers of binary distillation processes described by nonlinear convection/diffusion models*, American Control Conference (ACC), 2012, IEEE, 2012, pp. 3352–3358.
- [15] James M Greenberg and Li Ta Tsien, *The effect of boundary damping for the quasilinear wave equation*, Journal of Differential Equations **52** (1984), no. 1, 66–75.
- [16] Long Hu, Florent Di Meglio, Rafael Vazquez, and Miroslav Krstic, *Control of homodirectional and general heterodirectional linear coupled hyperbolic pdes*, (2015).
- [17] Fritz John, *Continuous dependence on data for solutions of partial differential equations with a prescribed bound*, Communications on pure and applied mathematics **13** (1960), no. 4, 551–585.
- [18] Daqian Li, *Global classical solutions for quasilinear hyperbolic systems*, vol. 32, John Wiley & Sons, 1994.
- [19] Tatsien Li and Bopeng Rao, *Strong (weak) exact controllability and strong (weak) exact observability for quasilinear hyperbolic systems*, Chinese Annals of Mathematics, Series B **31** (2010), no. 5, 723–742.
- [20] Christophe Prieur and Frédéric Mazenc, *Iss-lyapunov functions for time-varying hyperbolic systems of balance laws*, Mathematics of Control, Signals, and Systems **24** (2012), no. 1-2, 111–134.
- [21] Christophe Prieur, Joseph Winkin, and Georges Bastin, *Robust boundary control of systems of conservation laws*, Mathematics of Control, Signals, and Systems **20** (2008), no. 2, 173–197.
- [22] Tie Hu Qin, *Global smooth solutions of dissipative boundary-value problems for 1st order quasilinear hyperbolic systems*, CHINESE ANNALS OF MATHEMATICS SERIES B **6** (1985), no. 3, 289–298.
- [23] Valérie Dos Santos and Christophe Prieur, *Boundary control of open channels with numerical and experimental validations*, Control Systems Technology, IEEE Transactions on **16** (2008), no. 6, 1252–1264.
- [24] Gerald Beresford Whitham, *Linear and nonlinear waves*, vol. 42, John Wiley & Sons, 2011.
- [25] Cheng-Zhong Xu and Gauthier Sallet, *Exponential stability and transfer functions of processes governed by symmetric hyperbolic systems*, ESAIM: Control, Optimisation and Calculus of Variations **7** (2002), 421–442.