AIDA-2020-SLIDE-2019-001

AIDA-2020

Advanced European Infrastructures for Detectors at Accelerators

Presentation

The CERN Proton Irradiation Facility IRRAD during and after the CERN Long Shutdown 2

Brethoux, Damien (CERN) et al

14 January 2019



The AIDA-2020 Advanced European Infrastructures for Detectors at Accelerators project has received funding from the European Union's Horizon 2020 Research and Innovation programme under Grant Agreement no. 654168.

This work is part of AIDA-2020 Work Package **15: Upgrade of beam and irradiation test infrastructure**.

The electronic version of this AIDA-2020 Publication is available via the AIDA-2020 web site http://aida2020.web.cern.ch/ or on the CERN Document Server at the following URL: http://cds.cern.ch/search?p=AIDA-2020-SLIDE-2019-001

The CERN Proton Irradiation Facility IRRAD during and after the CERN Long Shutdown 2

D. Brethoux¹, J. Bronuzzi^{2&3}, <u>B. Gkotse^{2&4}</u>, M. Glaser², G. Gorine^{2&3}, P. Jouvelot³, M.R. Jaekel², M. Lazzaroni¹, I. Mateu², E. Matli⁵, G. Pezzullo², F. Ravotti²

- ¹ CERN EN
- ² CERN EP
- ³ EPFL
- ⁴ MINES ParisTech
- ⁵ CERN BE











Outline


- IRRAD Facility & Summary Proton Run 2018
- IRRAD Data Manager
- IRRAD Infrastructure Upgrades (AIDA-2020 D15.7)
- Heavy Ions Run 2017-2018
- Activities during LS2



Proton Irradiation Facility IRRAD


- Testing inner detector components of the **HEP** experiments
- Beam of 24 GeV/c and size of 12×12 mm²
- ➤ Spills of ~400 msec every ~10 sec

- > Fluence of 1×10¹⁶ p/cm² in 14 days
- **Scanning** up to dimensions of 10×10cm²
- Cryostat with LHe 1.9K
- Low T irradiations (-25°C)

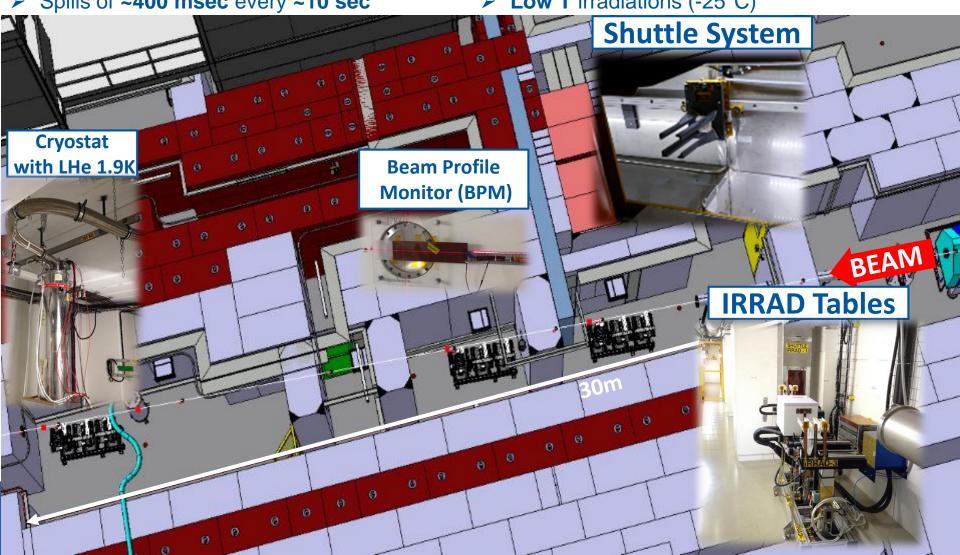


IRRAD: Summary Run 2018

- 81 experiments completed in 2018:
 - <u>92 users</u> registered in the IRRAD Data Manager (<u>cern.ch/irrad-data-manager</u>)
 - 996 objects declared by the users
 - 792 objects irradiated

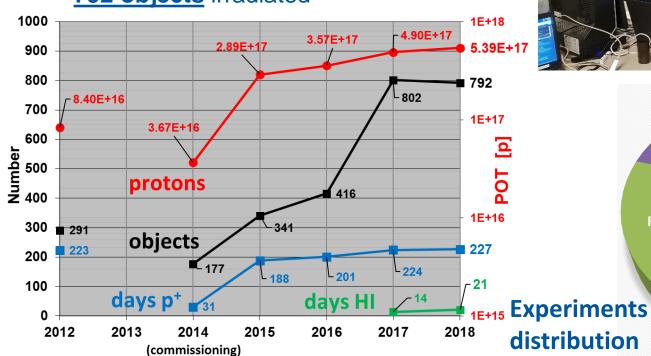



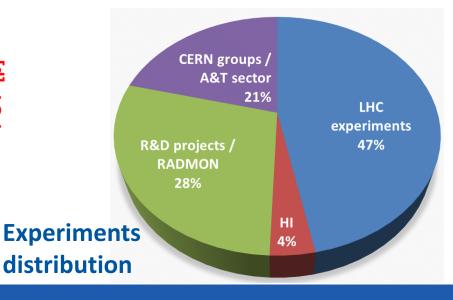

IRRAD: Summary Run 2018




Piezo actuators

for Crystal Collimation, Vacuum, Cryogenics, etc. (EN,TE)

> RD53A modules for ATLAS ITk








14/01/2019

2x FEAST2 DC/DC converters test


in cold-box & RT with "thin" 10mm Cu

target (EP-ESE)

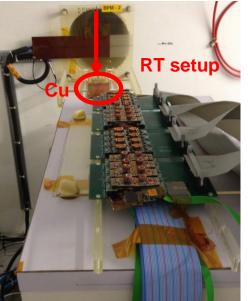



IRRAD 10mm Cu Target

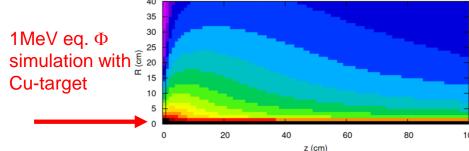





Outline

- IRRAD Facility & Summary Proton Run 2018
- IRRAD Data Manager
- IRRAD Infrastructure Upgrades (AIDA-2020 D15.7)
- Heavy Ions Run 2017-2018
- Activities during LS2

IRRAD Data Manager (IDM)

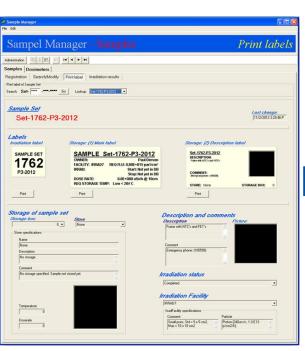

Traceability (Before)

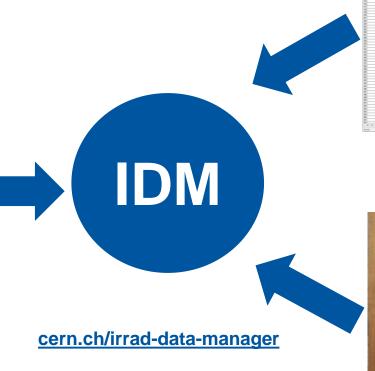

Facility Operation (During)



Dosimetry Results & Archive (After)

IDM: Key Features

Experiments, samples, users and dosimeters registration

Label printing

Real-time follow-up of irradiation experiments


Computation of proton interaction parameters

 Display and archive of dosimetry result (~600 spectrometry measurements/year)

- User Interface preferences customization
- History and details of past experiments (with user permission)
- Can be used also for irradiations in other facilities (PSI)


After

New IDM IDM: Irradiation Experiments View

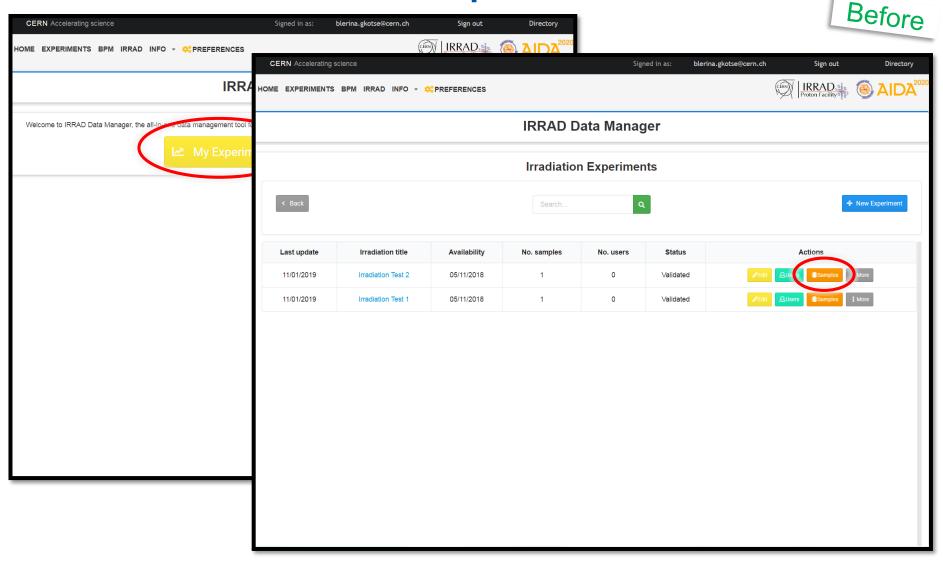

IDM: Samples View



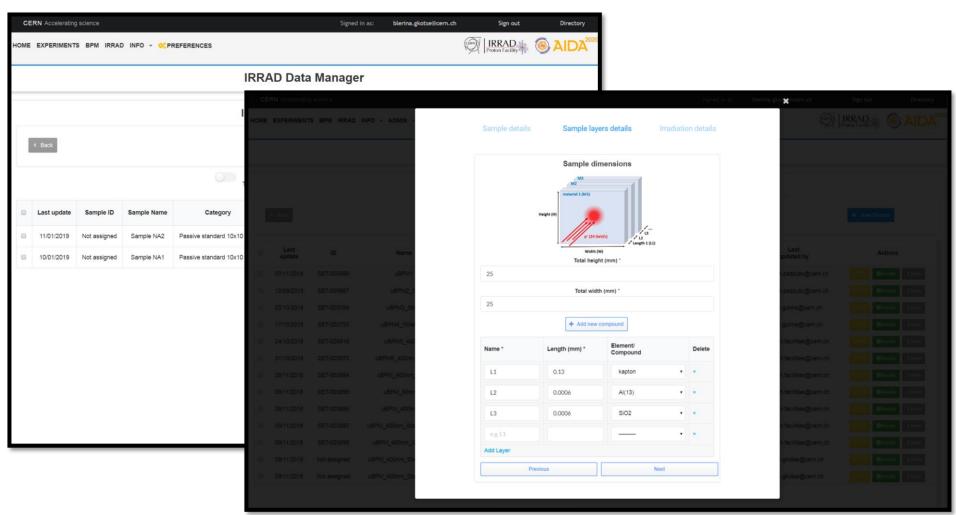


cern.ch/irrad-data-manager




IDM: Irradiation Status View



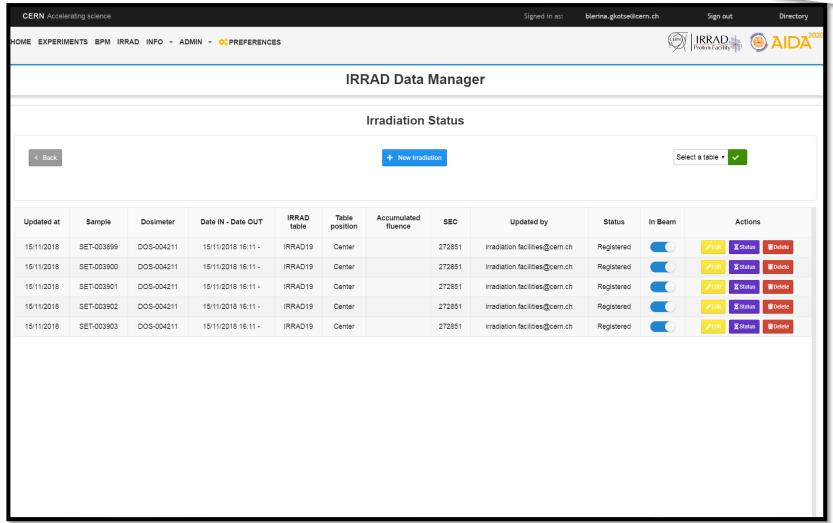


IDM: Dosimetry Results View



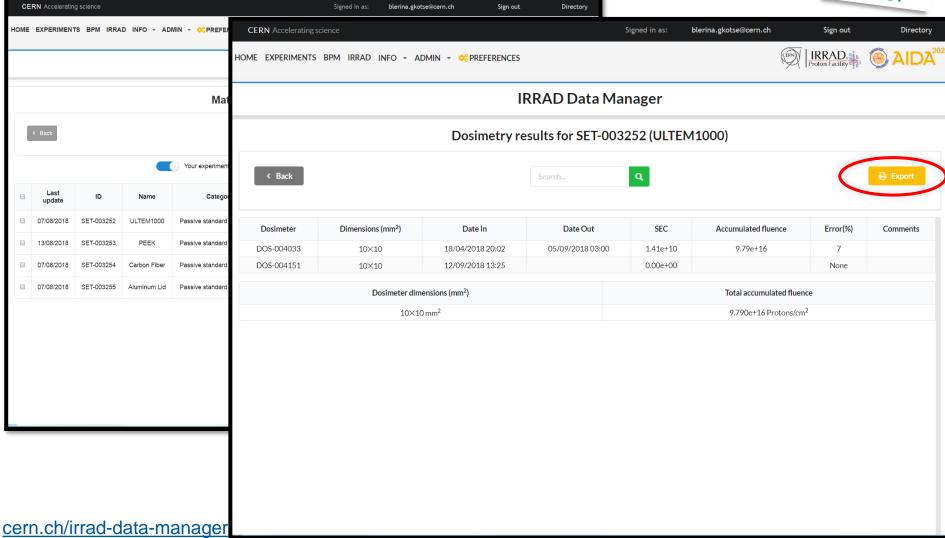


IDM: Experiments History View

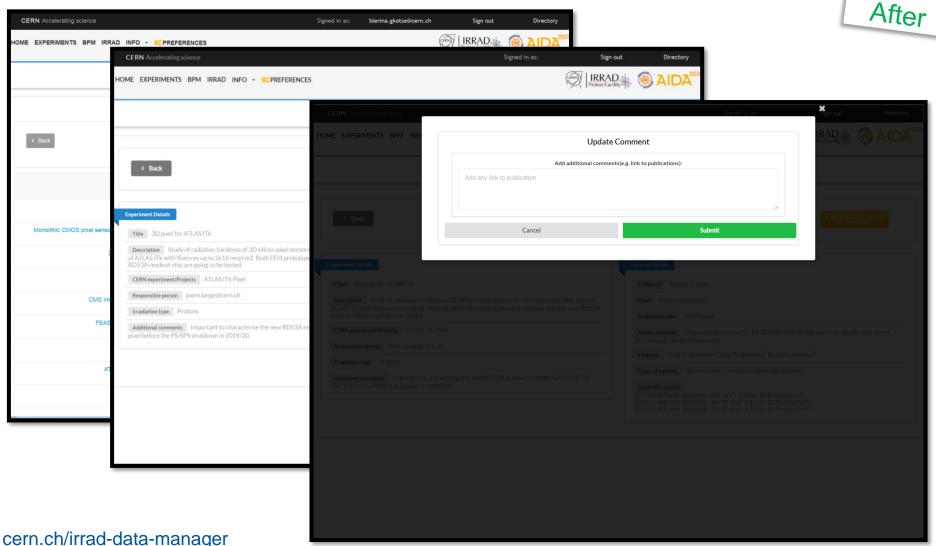



Ontology-based Graphical User Interface Generation

- Purpose: Formalisation of knowledge gained from IDM and application to other irr. facilities
- Irradiation experiment model (ontology)* → Automatic User Interfaces (UI) generation → Machine learning techniques for UI customisation

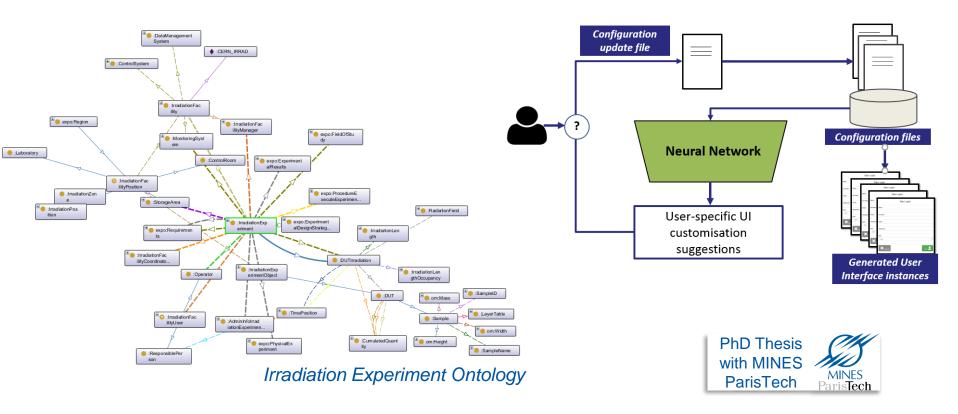

*Abstract and paper submitted to the European Web Semantics Conference 2019 (ESWC https://2019.eswc-conferences.org/)



Outline


- IRRAD Facility & Summary Proton Run 2018
- IRRAD Data Manager
- IRRAD Infrastructure Upgrades (AIDA-2020 D15.7)
 - Damage and Degradation of equipment
 - Sample Holders for Higher Fluence Levels
 - RadHard Instrumentation for IRRAD (μ-BPM)
- Heavy lons Run 2017-2018
- Activities during LS2




Damage and Degradation Equipment

Infrastructure damage and degradation is accelerated due to the need of operating with always higher intensities

(~2e18 protons on target in 4 years and ~30% of experiments in the range of 1e16-1e17 protons/cm² in 2018)

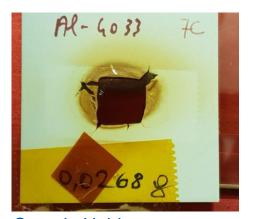

Sample Holder

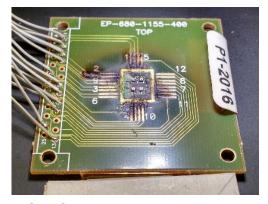

PCB Carrier



Beam Profile Monitor (BPM) & mini-BPM



Irradiation Equipment



See I. Mateu in AIDA-2020 WP15 satellite meeting

Support Frame



Cold Box Window



Sample Holders for Higher Fluence Levels


(AIDA-2020 D15.7)


See I. Mateu in AIDA-2020 WP15 satellite meeting

Stress Test

Carbon Fiber




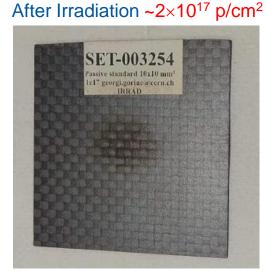

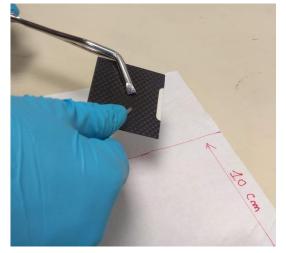





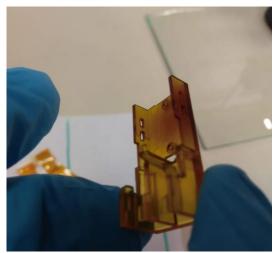

RadHard Instrumentation for IRRAD (μ-BPM)

(AIDA-2020 D15.7)

Today's mini-BPMs are produced with standard PCB manufacturing techniques, and show:

- big degradation due to glue bubbling/burning
 - Need to change INSULATING MATERIAL without glue
- (relatively) low "transparency" to the beam
- very radioactive and long cool-down required
 - Need to reduce THICKNESS OF METAL
- This is possible using microfabrication techniques!











Micro-BPM: 6 layers 0.2 mm thick, 0.6 um of Al

Mini-BPM: 6 layers 0.5 mm thick ~100 um of Cu

1. Accepted to the 7th International Conference on Radiation in Various Fields of Research (RAD2019: http://www.rad2019.rad-conference.org/);


14/01/2019





See I. Mateu in AIDA-2020 WP15 satellite meeting

Current Beam Profile Monitor

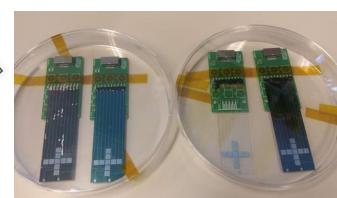

Different stacks were produced and tested


RadHard Instrumentation for IRRAD (μ-BPM)


(AIDA-2020 D15.7)

X profile

Y profile

Mini-BPM (Old) Micro-BPM (New)

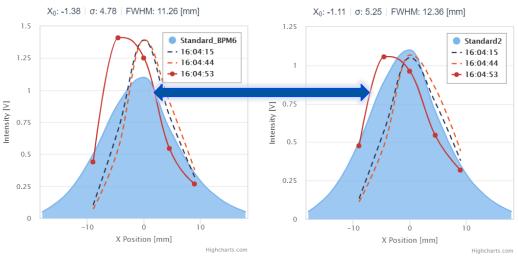

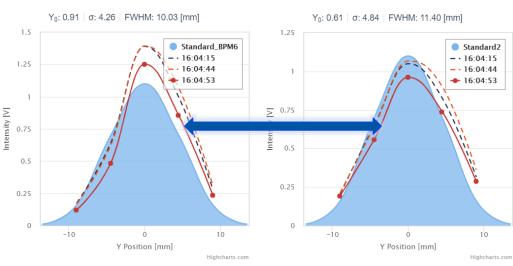

Outline


- IRRAD Facility & Summary Proton Run 2018
- IRRAD Data Manager
- IRRAD Infrastructure Upgrades (AIDA-2020 D15.7)
- Heavy Ions Run 2017-2018
- Activities during LS2




Heavy Ion (HI) Runs 2017-18


- 2 weeks with ⁵⁴Xe in 2017, 3 weeks with ⁸²Pb
 - Energy per nucleon: ~ 6 GeV/n
 - Ion flux: ~ 108 to 109 ions/spill
- Radiation Hardness tests of Space Electronics Components (CHARM)
 - Highly penetrating (SEE testing)
 - Representative of Galactic Cosmic Ray spec.

Samples on the CHARM conveyor (run 2018)



GafChromic film installed on the IRRAD BPM-2 (run 2017)

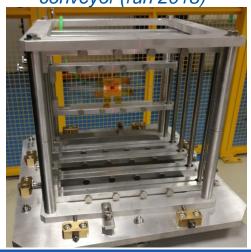

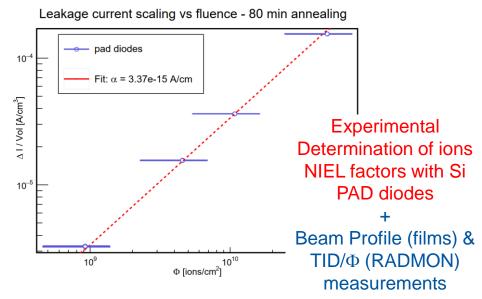

- lon dosimetry is a complex business!
 - PS instrumentation not calibrated
 - Lack of experience & methodologies
- Promote HI tests in East Area after LS2
 - Improve the dosimetry!
 - Build a use case with interested EP experiments?
 - Potential users in the Test-Beams community?

Outline

- **IRRAD Facility & Summary Proton Run 2018**
- **IRRAD Data Manager**
- IRRAD Infrastructure Upgrades (AIDA-2020 D15.7)

- **Heavy Ions Run 2017-2018**
- **Activities during LS2**

IRRAD during LS2

> East Area Consolidation Project

- Upgrade of East Area Beam Instrumentation
- Modification of EA water network
- •

> IRRAD-specific improvements

- Mandatory preventive maintenance of all irradiation systems
 - Including the software infrastructure (Online display, BPM DAQ, control systems, etc...)
- Refurbishment/upgrade of degraded irradiation equipment
 - Repair/exchange one Huber chiller unit
 - Replace cooling boxes, setup VORTEX, etc..
- Inventory of radioactive material in our storage areas (bld. 13/14/157)
 - Contacting users for their samples






Cold box



IRRAD during LS2

Instruments for measuring and characterizing radioactive material:

- Suss PM8 Probe Station (Available to the users)
- Keithley 4200A Semiconductor Parameter Analyzer (Available to the users)
- Climatic chamber (Purchased)
- γ-spectrometer (To be installed)
- etc.

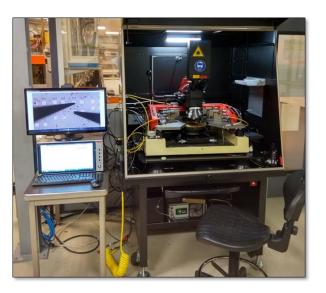


Suss PM8 Probe Station



100Liters Temperature & Humidity Test Chamber



γ-spectrometer

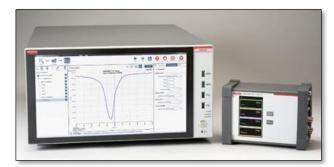

Keithley 4200A Semiconductor Parameter Analyzer



IRRAD during LS2

- Setup a dedicated laboratory (for probe-station setup, climatic chamber, γ -spectrometer, etc.)
- Increase storage and material handling space

Extension of the IRRAD Technical Area (Project under study),


EP-DT in collaboration with **EN-EA** Operational storage IRRAD1B (counting-room) Spectrometry Long-term storage bunker Station Measurement lab 2 bunker Measurement lab 1 bunker



Pion Irradiations at PSI

- IRRAD not operational until spring 2021
- Possibility of pion irradiations at PSI under evaluation:
 - $-\pi^{+} 300 \,\text{MeV/c}$
 - Typical max fluence level in the range of some 1e15 n_{eq}/cm^2

- Variable beam spot along the beam axis
- Stay updated at cern.ch/ps-irrad!

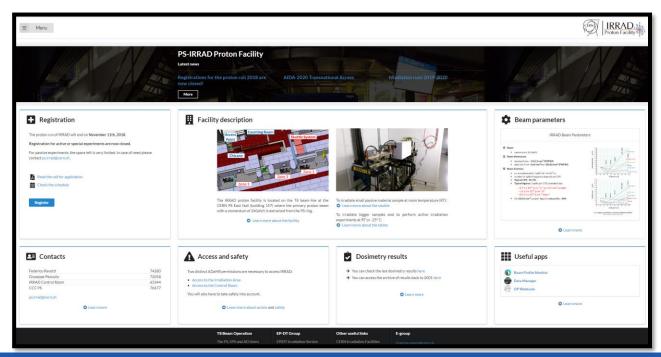



Conclusions

- First run (2014-2018) of the "new" IRRAD facility was successful
- Significant milestones achieved:
 - New IRRAD Data Manager System fully operational
 - Advancements in beam instrumentation and irradiation equipment R&D (AIDA-2020)
 - Possibility to perform experiments with Heavy Ions after LS2?
 - -etc.
- IRRAD not operational during LS2 (2019-2021)
- Activities during LS2 for IRRAD:
 - Maintenance, upgrade and consolidation
 - Extension of the technical area (handling & measurement of irradiated samples)
- Possible pion irradiations in PSI organized by the IRRAD team in EP-DT

